

Cable gland blueglobe™ Fire protection

Metric cable gland made of nickel-plated brass, in accordance with EN45545-2

Item number: 101.352.320

Packing unit: 25



BRASS

Surface: Electroless nickel

Material cable grip: Silicone HT

Clamping range min. Ø [mm]: 15

Clamping range max. Ø [mm]: 25


BRASS

Tightening torque [Nm]:	15.0
Operating temperature [°C]:	-55 - +200
Fire protection class EN 45545-2:	R22:HL1/HL2/HL3 R23: HL1/HL2/HL3
Flammability rating UL 94:	V0
Protection class EN 60529:	IP69
Impact category:	6
RoHS-compliant:	Yes

STANDARDS

Fire protection class EN 45545-2:	R22:HL1/HL2/HL3 R23: HL1/HL2/HL3
Flammability rating UL 94:	V0
Protection class EN 60529:	IP69
RoHS-compliant:	Yes

DIMENSIONS

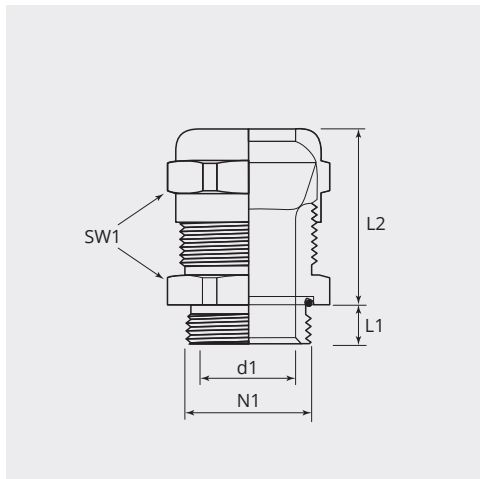

DIMENSIONS

WS1:	36 x39.5
d1 Ø [mm]:	25.2
Clamping range [mm]:	8.0 - 2.0
L1 [mm]:	8.00