

# Cable gland blueglobe™ tri Fire protection

Metric EMC cable gland made of nickel-plated brass, in accordance with EN45545-2

Item number: 104.340.330

Product weight (kg): 0.1086 kg

Packing unit: 25



## BRASS

Material cable grip: Silicone HT

Clamping range min. Ø [mm]: 15

Clamping range max. Ø [mm]: 25

Tightening torque [Nm]: 15.0


## BRASS

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Operating temperature [°C]:       | -55 - +200                          |
| Fire protection class EN 45545-2: | R22:HL1/HL2/HL3<br>R23: HL1/HL2/HL3 |
| Flammability rating UL 94:        | V0                                  |
| Protection class EN 60529:        | IP69                                |
| Impact category:                  | 6                                   |
| EMI:                              | Yes                                 |
| RoHS-compliant:                   | Yes                                 |

## STANDARDS

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Fire protection class EN 45545-2: | R22:HL1/HL2/HL3<br>R23: HL1/HL2/HL3 |
| Flammability rating UL 94:        | V0                                  |
| Protection class EN 60529:        | IP69                                |
| RoHS-compliant:                   | Yes                                 |

## DIMENSIONS

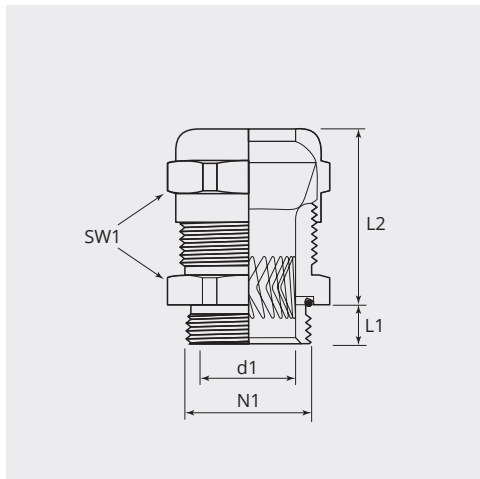

## DIMENSIONS

|                      |           |
|----------------------|-----------|
| WS1:                 | 36 x39.5  |
| d1 Ø [mm]:           | 25.2      |
| Clamping range [mm]: | 8.0 - 2.0 |
| L1 [mm]:             | 8.00      |