

90° elbow backshell

With swivel nut for individual positioning of the wire & cable

Item number: BEN28-AA
Product weight (kg): 0.0746 kg
Packing unit:




MECHANICAL PROPERTIES

Size:	28
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	10-15μ
Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone

STANDARDS

Fire protection class EN 45545-2:	R22:HL1/HL2/HL3 R23: HL1/HL2/HL3
Protection class EN 60529 (mounted):	IP69
RoHS-compliant:	compliant
REACH-compliant:	SVHC substances, no

DIMENSIONS

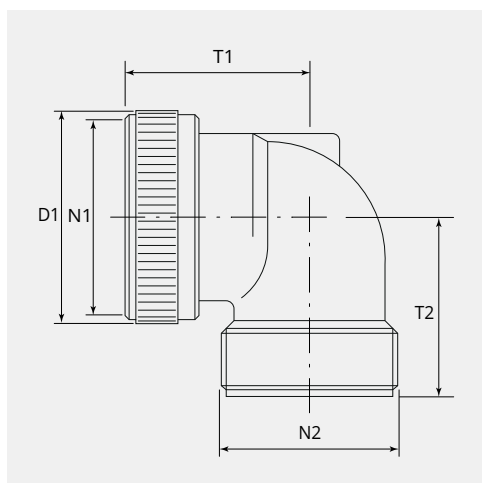

DIMENSIONS

D1 Ø [mm]:	45
N1:	1 5/8"-18 UNEF 2B
N2:	1 7/16"-18 UNEF 2A
T1 [mm]:	38.5
T2 [mm]:	40.0



· Please contact your Gimota partner for other shell materials or surface coatings.