

Sealing insert / Grommet

22-14

Item number:	BG22-14-E
Product weight (kg):	0.0083 kg
Packing unit:	



MECHANICAL PROPERTIES

Size:	22
-------	----


THERMAL PROPERTIES

Material contact insert:	Ethylene acrylate GXF / thermoplastic
Operating temperature insert [°C]:	-55 - +150

STANDARDS

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

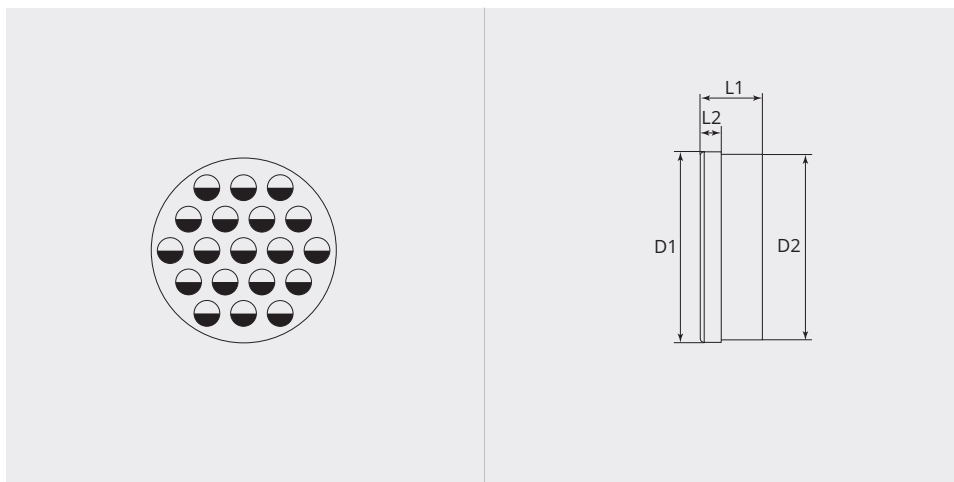

DIMENSIONS

D1 Ø [mm]:	27.6
D2 Ø [mm]:	25.3
L1 [mm]:	13.3
L2 [mm]:	2.4

Grommets are sitting inside the backshells. The applied compression ring compresses the grommet during tightening the backshell to the plug/receptacle. The grommet deforms and seals and support the installed wires accordingly. The compression ring also avoid increasing friction (gliding ring) if tightening the backshell onto the plug/receptacle that may cause distortion of the elastomeric grommet.

- For 90° elbow backshells, no compression rings are needed.