


EMI adapter with IRIS- spring and strain relief

Item number: EII14S-05-AA

Product weight (kg): 0.0404 kg

Packing unit:



MECHANICAL PROPERTIES

Size: 14S

Shell material: Aluminum alloy

Surface: Zinc


Type of surface: Passivated

Thickness of surface treatment [μ]: 10-15 μ

MECHANICAL PROPERTIES

Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone
Clamping range min. Ø [mm]:	5
Clamping range max. Ø [mm]:	10

DIMENSIONS

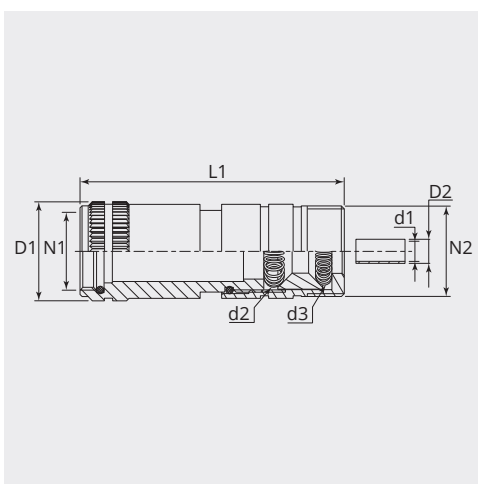

DIMENSIONS

D1 Ø [mm]:	24
D2 Ø [mm]:	6.9
d1 Ø [mm]:	5.5
d2 Ø [mm]:	4-7
d3 Ø [mm]:	5-10
N1:	3/4"-20 UNEF 2B
N2:	7/8"-20 UNEF 2B
Clamping range min. Ø [mm]:	5
Clamping range max. Ø [mm]:	10

· Please contact your Gimota partner for other shell materials or surface coatings.