


EMI adapter with IRIS- spring and strain relief

Item number: EII14S-09-AA

Product weight (kg): 0.0413 kg

Packing unit:




MECHANICAL PROPERTIES

Size:	14S
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	10-15 μ

MECHANICAL PROPERTIES

Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone
Clamping range min. Ø [mm]:	8.5
Clamping range max. Ø [mm]:	13.5

DIMENSIONS

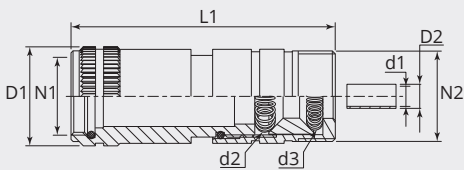

DIMENSIONS

D1 Ø [mm]:	24
D2 Ø [mm]:	6.9
d1 Ø [mm]:	5.5
d2 Ø [mm]:	4-7
d3 Ø [mm]:	8.5-13.5
L1 [mm]:	70
N1:	3/4"-20 UNEF 2B
N2:	7/8"-20 UNEF 2B
Clamping range min. Ø [mm]:	8.5
Clamping range max. Ø [mm]:	13.5

· Please contact your Gimota partner for other shell materials or surface coatings.