

Contact housing Trac F - 31-poles

Item number: FKEF31

Product weight (kg): 0.0325 kg


Packing unit:



TECHNICAL CHARACTERISTICS

Shell material:	Reinforced polyester
Operation temperature [°C]:	-55 - +105

DIMENSIONS

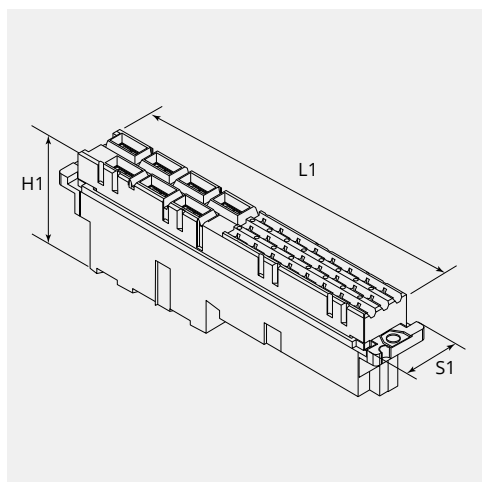



DIMENSIONS

L1 [mm]:	84.9
----------	------

Height [mm]:	31
--------------	----

S1 [mm]:	14.7
----------	------

Trac F contacts, snap-In, AWG 26 - 20

Item number: FSCS-26AU1

Product weight (kg): 0.0003 kg


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.12 - 0.5
Wire section [AWG]:	26 - 20

DIMENSIONS

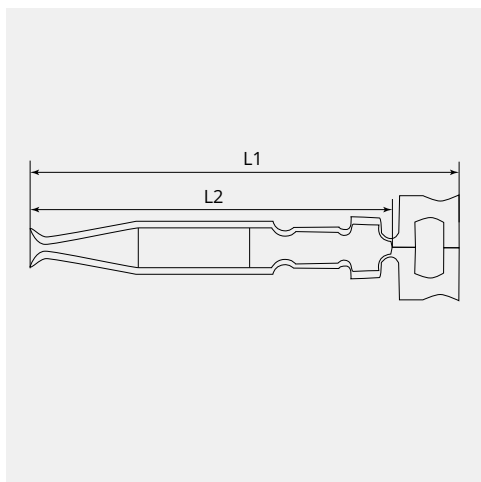

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, snap-In, AWG 26 - 20, 5000 pcs

Item number: FSCS-26AU1-50


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.12 - 0.5
Wire section [AWG]:	26 - 20

DIMENSIONS

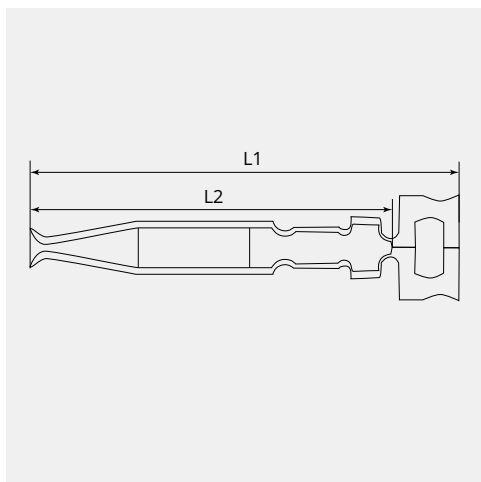

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, snap-In, AWG 20 - 15


Item number: FSCS-20AU1
Product weight (kg): 0.0003 kg
Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.5 - 1.5
Wire section [AWG]:	20 - 15

DIMENSIONS

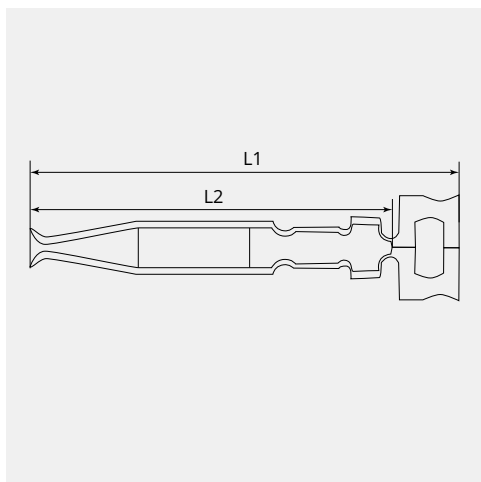

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, faston contact AWG 17 - 14

Item number: FSCF-17

Product weight (kg): 0.0001 kg


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	brass
Protective layer:	Tin plated
Connection type:	Crimp
Wire section [mm²]:	1.0 - 2.5
Wire section [AWG]:	17 - 14

DIMENSIONS

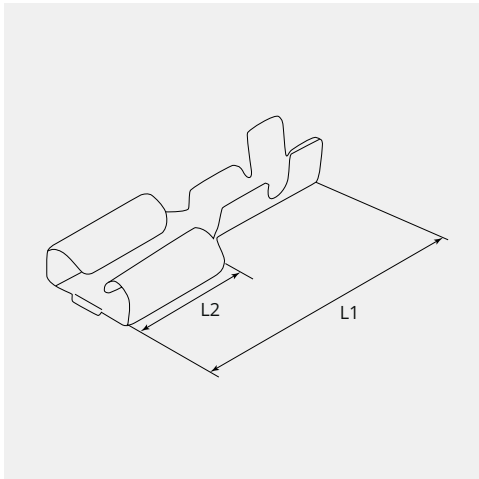

DIMENSIONS

L1 [mm]:	19.0
L2 [mm]:	7.7

Trac F contacts, snap-In, AWG 20 - 15, 5000 pcs

Item number: FSCS-20AU1-50


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.5 - 1.5
Wire section [AWG]:	20 - 15

DIMENSIONS

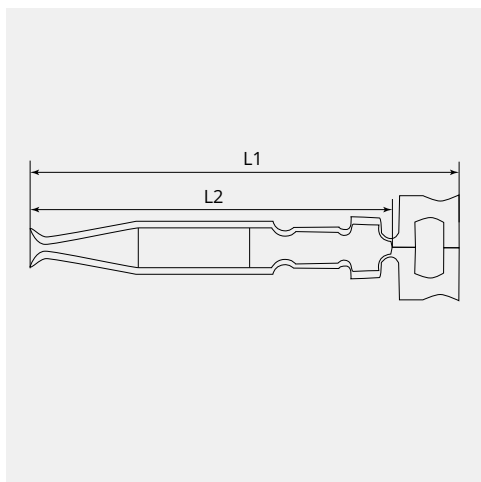

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, faston contact AWG 20 - 17


Item number: FSCF-20
Product weight (kg): 0.0007 kg
Packing unit: 100



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	brass
Protective layer:	Tin plated
Connection type:	Crimp
Wire section [mm²]:	0.5 - 1.0
Wire section [AWG]:	20 - 17

DIMENSIONS

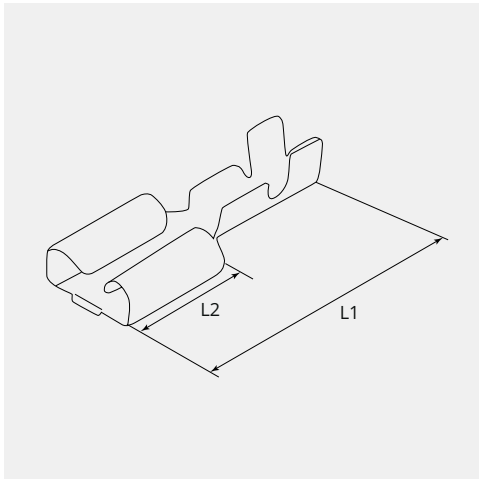

DIMENSIONS

L1 [mm]:	19.0
L2 [mm]:	7.7