

Contact housing Trac F - 48-poles

Item number: FKEF48

Product weight (kg): 0.0174 kg

Packing unit:




TECHNICAL CHARACTERISTICS

Shell material: Reinforced polyester

Operation temperature [°C]: -55 - +105

DIMENSIONS

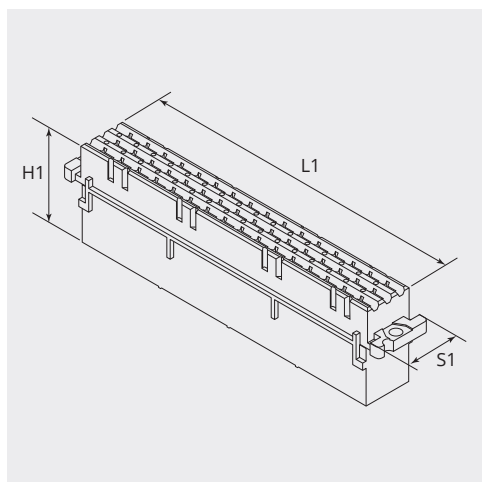



DIMENSIONS

L1 [mm]:	85.1
----------	------

Height [mm]:	25
--------------	----

S1 [mm]:	14.6
----------	------

Trac F contacts, snap-In, AWG 20 - 15

Item number: FSCS-20AU1

Product weight (kg): 0.0003 kg


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.5 - 1.5
Wire section [AWG]:	20 - 15

DIMENSIONS

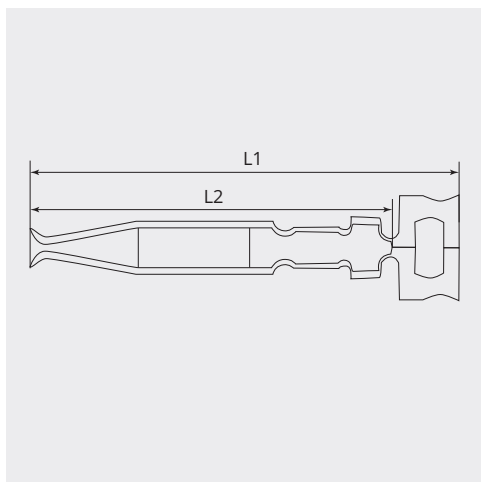

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, snap-In, AWG 26 - 20, 5000 pcs

Item number: FSCS-26AU1-50


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.12 - 0.5
Wire section [AWG]:	26 - 20

DIMENSIONS

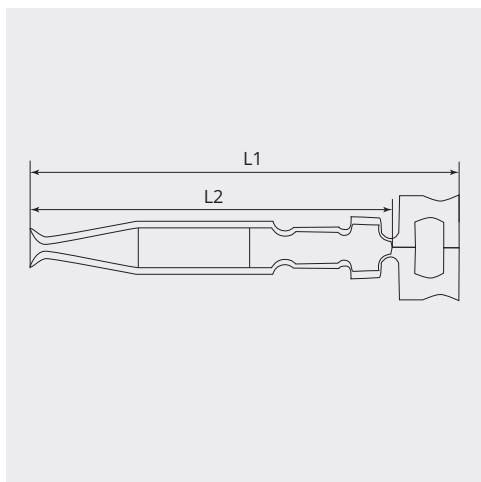

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, snap-In, AWG 20 - 15, 5000 pcs

Item number: FSCS-20AU1-50


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.5 - 1.5
Wire section [AWG]:	20 - 15

DIMENSIONS

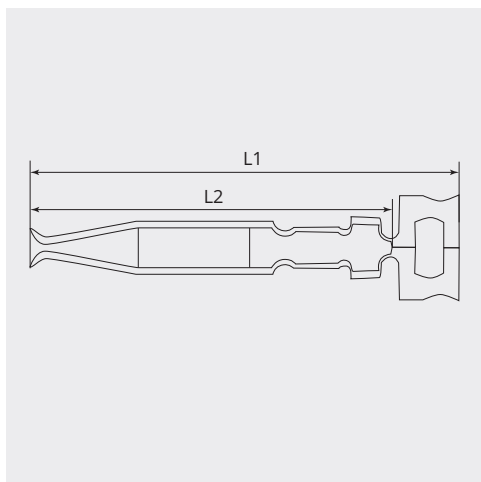

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5

Trac F contacts, snap-In, AWG 26 - 20

Item number: FSCS-26AU1

Product weight (kg): 0.0003 kg


Packing unit:



TECHNICAL CHARACTERISTICS

Contact type:	Socket
Contact Material:	Phosphorus bronze
Protective layer:	Nickel plated
Connection type:	Crimp
Wire section [mm²]:	0.12 - 0.5
Wire section [AWG]:	26 - 20

DIMENSIONS

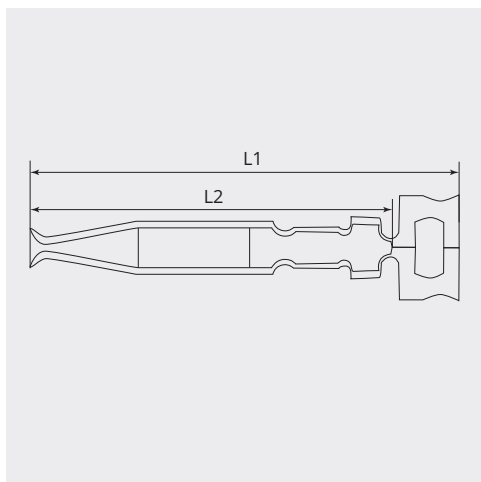

DIMENSIONS

L1 [mm]:	22.2
L2 [mm]:	18.5