

Rubberised plug-set with bayonet ring

Item number: GB064XL14S-5PN-EAA-A23

Product weight (kg): 0.0841 kg

Packing unit: 1



THE SET INCLUDES:

Plug:	GB604-14S-5PN-EAA
-------	-------------------

Backshell:	EII14S-05-AA
------------	--------------

Accessories:	BVIVG-U212
--------------	------------

MECHANICAL PROPERTIES

Size:	14S
Contact type:	Pin
Number of coding options:	1
Number of contacts, size 16s:	5
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	12-15 μ
Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125
Conductivity (M Ω):	≤ 0.5
EMI:	Yes
Material sealing ring:	Silicone
Coupling-torque to lock [Nm]:	max. 1.8
Coupling-torque to open [Nm]:	min. 0.55
Number of mating cycles (min.):	500

THERMAL PROPERTIES

Material contact insert:	Ethylene acrylate GXF / thermoplastic
Operating temperature insert [°C]:	-55 - +150
Temperature shock [°C]:	-55 - +125

Operating voltage DC [V]:	250
Operating voltage AC [V]:	200
Test voltage AC [V]:	1000
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 1.6
Voltage class:	MIL-DTL-5015


ELECTRICAL PROPERTIES CONTACTS

Size 16S - rated current (continuous) [A]:	13
Size 16S - maximum current (short-term) [A]:	22
Size 16S - test current [A]:	20

STANDARDS

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

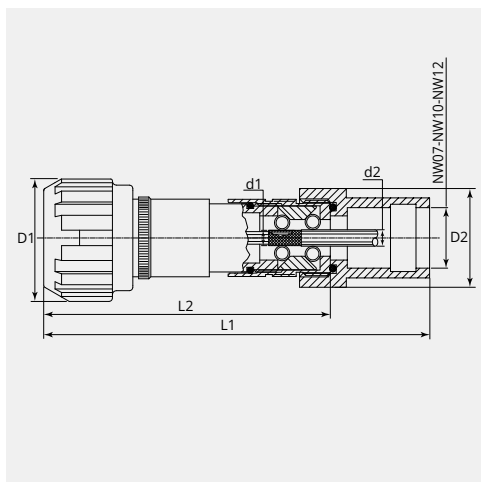

DIMENSIONS


D1 Ø [mm]:	40.2
D2 Ø [mm]:	29.0
d1 Ø [mm]:	4-7
d2 Ø [mm]:	5-10
L1 [mm]:	112-117
L2 [mm]:	max. 87

Pin contact size 16S, 0.25 - 0.5mm²

Item number: 10-40553-05AU

Product weight (kg): 0.0006 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	0.25 - 0.5
Wire section [AWG]:	22 - 20
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.15
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.1
L1 [mm]:	27
T1 [mm]:	6.4

Pin contact size 16S, 0.75 - 1.5mm²

Item number: 10-40553AU

Product weight (kg): 0.0006 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	0.75 - 1.5
Wire section [AWG]:	16
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.62
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.75
L1 [mm]:	27
T1 [mm]:	6.4