


Receptacle, front panel mount

Series GB

Item number: GB210-28-10SN-EAC

Packing unit: 1



MECHANICAL PROPERTIES

Size:	28
Contact type:	Socket
Number of coding options:	4
Number of contacts:	7
Number of contacts, size 4:	2
Number of contacts, size 8H:	2
Number of contacts, size 12:	3
Shell material:	Aluminum alloy
Surface:	Epoxy-polyurethane
Type of surface:	Varnished
Thickness of surface treatment [μ]:	13-16 μ
Surface colour:	Black
Corrosion resistance [h]:	500

MECHANICAL PROPERTIES

Operation temperature [°C]:	-55 - +125
Temperature shock [°C]:	-55 - +125
Conductivity (MΩ):	Non conductive
EMI:	No
Coupling-torque to lock [Nm]:	max. 7.0
Coupling-torque to open [Nm]:	min. 2.7

THERMAL PROPERTIES

Material contact insert:	Ethylene acrylate GXF
Operating temperature insert [°C]:	-55 - +150

ELECTRICAL PROPERTIES

Contact numbers:	G
Operating voltage DC [V]:	1250
Operating voltage AC [V]:	900
Test voltage AC [V]:	2800
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 4.8
Voltage class:	MIL-DTL-5015
Contact numbers:	Rest
Operating voltage DC [V]:	700
Operating voltage AC [V]:	500
Test voltage AC [V]:	2000
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 3.2
Voltage index:	MIL-DTL-5015




ELECTRICAL PROPERTIES CONTACTS

Size 4 - rated current (continuous) [A]:	80
Size 4 - maximum current (short-term) [A]:	135
Size 4 - test current [A]:	110
Size 8H - rated current (continuous) [A]:	56
Size 8H - maximum current (short-term) [A]:	90
Size 8H - test current [A]:	72
Size 12 - rated current (continuous) [A]:	23
Size 12 - maximum current (short-term) [A]:	41
Size 12 - test current [A]:	35

Fire protection class EN 45545-2:

R23/HL3

DIMENSIONS

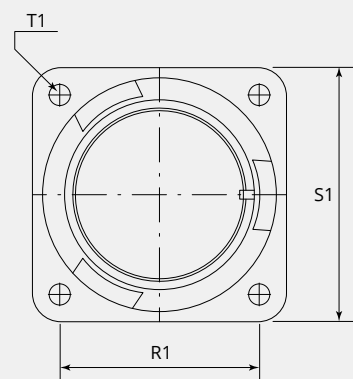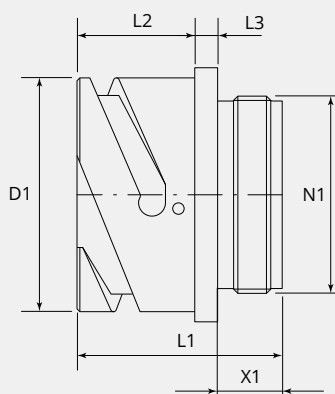

DIMENSIONS

D1 Ø [mm]:	46.7
L1 [mm]:	36.0
L2 [mm]:	20.6
L3 [mm]:	4.0
N1:	1 5/8"-18 UNEF 2A
T1 [mm]:	3.7
X1 [mm]:	9.0
S1 [mm]:	50.8
R1 [mm]:	39.7

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method Electrical conductivity acc. MIL 1344A, Test 3007