


# Receptacle, front panel mount

Series GB

Item number: GB210-40-A10SN-EAC

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 40                 |
| Contact type:                             | Socket             |
| Number of coding options:                 | 4                  |
| Number of contacts:                       | 8                  |
| Number of contacts, size 4:               | 4                  |
| Number of contacts, size 16:              | 4                  |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [ $^{\circ}$ C]:    | -55 - +125         |

## MECHANICAL PROPERTIES

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): Non conductive

EMI: No

Coupling-torque to lock [Nm]: max. 10.0

Coupling-torque to open [Nm]: min. 5.9

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 1250

Operating voltage AC [V]: 900

Test voltage AC [V]: 2800

Insulation resistance (MΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 4.8




Voltage class: MIL-DTL-5015

## ELECTRICAL PROPERTIES CONTACTS

|                                             |     |
|---------------------------------------------|-----|
| Size 4 - rated current (continuous) [A]:    | 80  |
| Size 4 - maximum current (short-term) [A]:  | 135 |
| Size 4 - test current [A]:                  | 110 |
| Size 16 - rated current (continuous) [A]:   | 13  |
| Size 16 - maximum current (short-term) [A]: | 22  |
| Size 16 - test current [A]:                 | 20  |

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

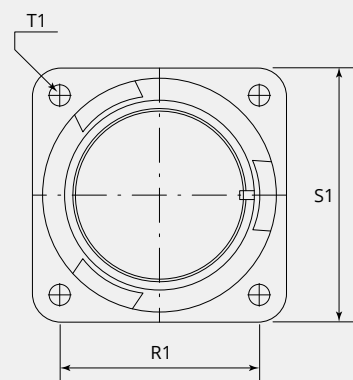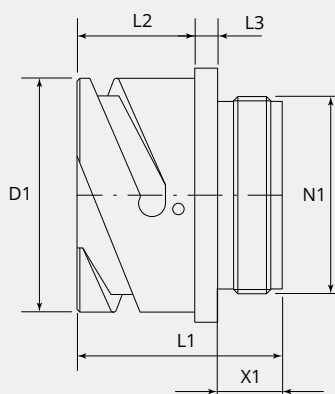

## DIMENSIONS

|            |                  |
|------------|------------------|
| D1 Ø [mm]: | 66               |
| L1 [mm]:   | 37.5             |
| L2 [mm]:   | 22.2             |
| L3 [mm]:   | 4.0              |
| N1:        | 2 5/16"-16 UN 2A |
| T1 [mm]:   | 4.3              |
| X1 [mm]:   | 11.3             |
| S1 [mm]:   | 69.8             |
| R1 [mm]:   | 55.6             |

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method Electrical conductivity acc. MIL 1344A, Test 3007