

# Plug with bayonet coupling nut

Series GB

Item number: GB60-20-18PN-EAC

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 20                 |
| Contact type:                             | Pin                |
| Number of coding options:                 | 4                  |
| Number of contacts:                       | 9                  |
| Number of contacts, size 12:              | 3                  |
| Number of contacts, size 16:              | 6                  |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [ $^{\circ}$ C]:    | -55 - +125         |

## MECHANICAL PROPERTIES

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): Non conductive

EMI: No

Material sealing ring: Silicone

Coupling-torque to lock [Nm]: max. 5.0

Coupling-torque to open [Nm]: min. 1.5

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF / thermoplastic

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 700

Operating voltage AC [V]: 500

Test voltage AC [V]: 2000

Insulation resistance (mΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 3.2

Voltage class: MIL-DTL-5015



## ELECTRICAL PROPERTIES CONTACTS

|                                             |    |
|---------------------------------------------|----|
| Size 12 - rated current (continuous) [A]:   | 23 |
| Size 12 - maximum current (short-term) [A]: | 41 |
| Size 12 - test current [A]:                 | 35 |
| Size 16 - rated current (continuous) [A]:   | 13 |
| Size 16 - maximum current (short-term) [A]: | 22 |
| Size 16 - test current [A]:                 | 20 |

## STANDARDS

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

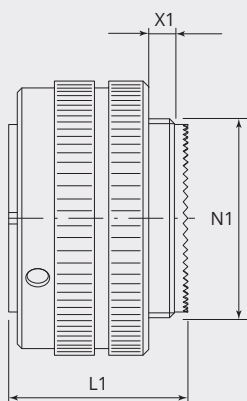

## DIMENSIONS


|            |                   |
|------------|-------------------|
| D1 Ø [mm]: | 40                |
| L1 [mm]:   | 36                |
| N1:        | 1 1/8"-18 UNEF 2A |
| X1 [mm]:   | 9                 |

## Pin contact size 12, 1.5mm<sup>2</sup>

Item number: 10-40561-18AU

Product weight (kg): 0.0024 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|               |     |
|---------------|-----|
| Contact type: | Pin |
|---------------|-----|

|                                   |    |
|-----------------------------------|----|
| Maximum current (short-term) [A]: | 41 |
|-----------------------------------|----|

|                   |    |
|-------------------|----|
| Test current [A]: | 35 |
|-------------------|----|

|                                 |    |
|---------------------------------|----|
| Rated current (continuous) [A]: | 23 |
|---------------------------------|----|

|                   |          |
|-------------------|----------|
| Contact Material: | CU alloy |
|-------------------|----------|

|                   |                    |
|-------------------|--------------------|
| Protective layer: | Gold plated, 0.5µm |
|-------------------|--------------------|


|                  |       |
|------------------|-------|
| Connection type: | Crimp |
|------------------|-------|

|                                  |     |
|----------------------------------|-----|
| Wire section [mm <sup>2</sup> ]: | 1.5 |
|----------------------------------|-----|

|                     |         |
|---------------------|---------|
| Wire section [AWG]: | 18 - 16 |
|---------------------|---------|

|                        |   |
|------------------------|---|
| Stripping length [mm]: | 9 |
|------------------------|---|

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| D3 Ø [mm]: | 2.4  |
| d1 Ø [mm]: | 1.75 |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Pin contact size 16, 0.25 -0.5mm<sup>2</sup>

Item number: 10-40557-05AU

Product weight (kg): 0.0009 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.25 - 0.5         |
| Wire section [AWG]:               | 22 - 20            |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.15 |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.1  |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |

## Pin contact size 12, 0.5mm<sup>2</sup>

Item number: 10-40561-11AU

Product weight (kg): 0.0022 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5μm


Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.5

Wire section [AWG]: 20

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS


|            |     |
|------------|-----|
| D1 Ø [mm]: | 4.8 |
| D2 Ø [mm]: | 3   |
| D3 Ø [mm]: | 2.4 |
| d1 Ø [mm]: | 1.1 |
| L1 [mm]:   | 38  |
| T1 [mm]:   | 8.5 |

## Pin contact size 12, 2.5mm<sup>2</sup>

Item number: 10-40561-22AU

Product weight (kg): 0.0023 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 2.5                |
| Wire section [AWG]:               | 14                 |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| D3 Ø [mm]: | 2.4  |
| d1 Ø [mm]: | 2.25 |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Pin contact size 16, 1.5mm<sup>2</sup>

Item number: 10-40557-20-1AU

Product weight (kg): 0.001 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1.5                |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.62 |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.75 |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |

## Pin contact size 12, 0.75 - 1.0mm<sup>2</sup>

Item number: 10-40561-15AU

Product weight (kg): 0.0022 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.75 - 1.0

Wire section [AWG]: 22 - 18

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.35 |
| D3 Ø [mm]: | 2.4  |
| d1 Ø [mm]: | 1.45 |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Pin contact size 12, 6.0mm<sup>2</sup>

Item number: 10-40561-38AU

Product weight (kg): 0.0023 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm<sup>2</sup>]: 6

Wire section [AWG]: 10

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| D3 Ø [mm]: | 2.4  |
| d1 Ø [mm]: | 3.5  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Pin contact size 16, 1.0mm<sup>2</sup>

Item number: 10-40557AU

Product weight (kg): 0.001 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1                  |
| Wire section [AWG]:               | 16                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |     |
|------------|-----|
| D1 Ø [mm]: | 3.1 |
| D2 Ø [mm]: | 2.9 |
| D3 Ø [mm]: | 1.6 |
| d1 Ø [mm]: | 1.8 |
| L1 [mm]:   | 32  |
| T1 [mm]:   | 6.4 |

## Pin contact size 16, 0.75mm<sup>2</sup>

Item number: 10-40557-075AU

Product weight (kg): 0.0009 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.75               |
| Wire section [AWG]:               | 18                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.2  |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.35 |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |

## Pin contact size 12, 4.0mm<sup>2</sup>

Item number: 10-40561-30AU

Product weight (kg): 0.0025 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm<sup>2</sup>]: 4

Wire section [AWG]: 12 - 10

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| D3 Ø [mm]: | 2.4  |
| d1 Ø [mm]: | 2.95 |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |