

# Plug with bayonet coupling nut

Series GB

Item number: GB60-24-28SN-EAC  
Product weight (kg): 0.0747 kg  
Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 24                 |
| Contact type:                             | Socket             |
| Number of coding options:                 | 4                  |
| Number of contacts:                       | 24                 |
| Number of contacts, size 16:              | 24                 |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [°C]:               | -55 - +125         |
| Temperature shock [°C]:                   | -55 - +125         |

## MECHANICAL PROPERTIES

Conductivity (MΩ): Non conductive

EMI: No

Material sealing ring: Silicone

Coupling-torque to lock [Nm]: max. 6.5

Coupling-torque to open [Nm]: min. 2.0

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF / thermoplastic

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 250

Operating voltage AC [V]: 200

Test voltage AC [V]: 1000

Insulation resistance (mΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 1.6

Voltage class: MIL-DTL-5015

## ELECTRICAL PROPERTIES CONTACTS

Size 16 - rated current (continuous) [A]: 13

Size 16 - maximum current (short-term) [A]: 22


Size 16 - test current [A]: 20

## STANDARDS

Fire protection class EN 45545-2:

R23/HL3

## DIMENSIONS

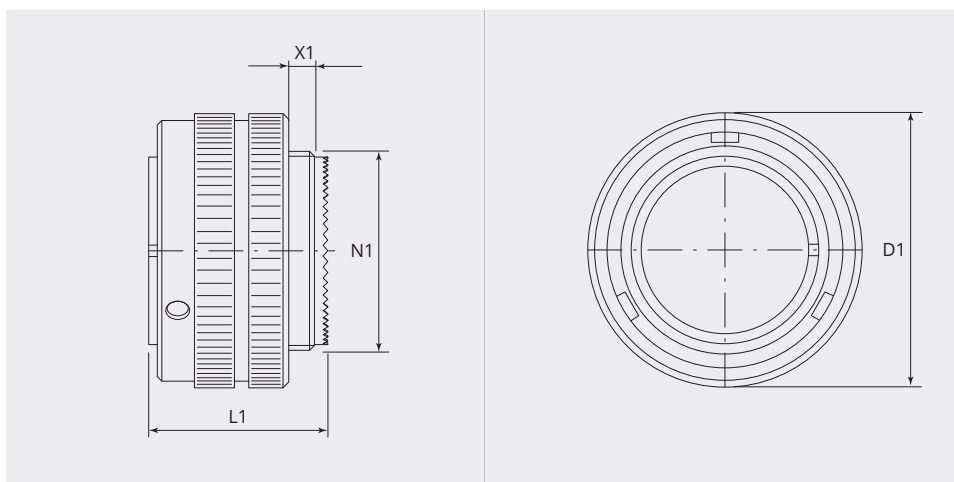

## DIMENSIONS


|            |                   |
|------------|-------------------|
| D1 Ø [mm]: | 48                |
| L1 [mm]:   | 36                |
| N1:        | 1 3/8"-18 UNEF 2A |
| X1 [mm]:   | 9                 |

## Socket contact size 16, 1.5mm<sup>2</sup>

Item number: 10-40556-20-1AU

Product weight (kg): 0.0016 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1.5                |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.62 |
| d1 Ø [mm]: | 1.75 |
| d2 Ø [mm]: | 1.6  |
| L1 [mm]:   | 37   |
| T1 [mm]:   | 6.4  |

## Socket contact size 16, 0.75mm<sup>2</sup>

Item number: 10-40556-075AU

Product weight (kg): 0.0015 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.75               |
| Wire section [AWG]:               | 18                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.2  |
| d1 Ø [mm]: | 1.35 |
| d2 Ø [mm]: | 1.6  |
| L1 [mm]:   | 37   |
| T1 [mm]:   | 6.4  |

## Socket contact size 16, 0.25 - 0.5mm<sup>2</sup>

Item number: 10-40556-05AU

Product weight (kg): 0.0002 kg

Packing unit:




### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.25 - 0.5         |
| Wire section [AWG]:               | 22 - 20            |
| Stripping length [mm]:            | 7                  |



## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.15 |
| d1 Ø [mm]: | 1.1  |
| d2 Ø [mm]: | 1.6  |
| L1 [mm]:   | 37   |
| T1 [mm]:   | 6.4  |

## Socket contact size 16, 1.0mm<sup>2</sup>

Item number: 10-40556AU

Product weight (kg): 0.0016 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1                  |
| Wire section [AWG]:               | 16                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 3.1 |
| D2 Ø [mm]: | 2.9 |
| d1 Ø [mm]: | 1.8 |
| d2 Ø [mm]: | 1.6 |
| L1 [mm]:   | 37  |
| T1 [mm]:   | 6.4 |