


# Plug with bayonet coupling nut

Series GB

Item number: GB60-28-22PN-EAC

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 28                 |
| Contact type:                             | Pin                |
| Number of coding options:                 | 4                  |
| Number of contacts:                       | 6                  |
| Number of contacts, size 4:               | 3                  |
| Number of contacts, size 16:              | 3                  |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [ $^{\circ}$ C]:    | -55 - +125         |

## MECHANICAL PROPERTIES

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): Non conductive

EMI: No

Material sealing ring: Silicone

Coupling-torque to lock [Nm]: max. 7.0

Coupling-torque to open [Nm]: min. 2.7

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF / thermoplastic

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 1250

Operating voltage AC [V]: 900

Test voltage AC [V]: 2800

Insulation resistance (mΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 4.8

Voltage class: MIL-DTL-5015



## ELECTRICAL PROPERTIES CONTACTS

|                                             |     |
|---------------------------------------------|-----|
| Size 4 - rated current (continuous) [A]:    | 80  |
| Size 4 - maximum current (short-term) [A]:  | 135 |
| Size 4 - test current [A]:                  | 110 |
| Size 16 - rated current (continuous) [A]:   | 13  |
| Size 16 - maximum current (short-term) [A]: | 22  |
| Size 16 - test current [A]:                 | 20  |

## STANDARDS

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

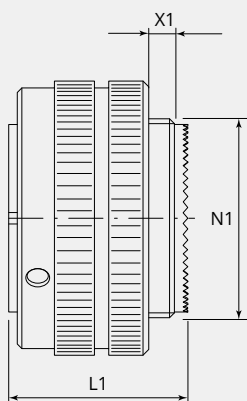

## DIMENSIONS

|            |                   |
|------------|-------------------|
| D1 Ø [mm]: | 54                |
| L1 [mm]:   | 36                |
| N1:        | 1 5/8"-18 UNEF 2A |
| X1 [mm]:   | 9                 |

## Pin contact size 4, 6.0mm<sup>2</sup>

Item number: 10-660-4-6G10

Product weight (kg): 0.012 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Pin                  |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 6                    |
| Wire section [AWG]:               | 8                    |
| Stripping length [mm]:            | 9                    |

## DIMENSIONS



## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 11  |
| D2 Ø [mm]: | 5.2 |
| D3 Ø [mm]: | 5.7 |
| d1 Ø [mm]: | 3.6 |
| L1 [mm]:   | 41  |
| T1 [mm]:   | 8.5 |

## Pin contact size 16, 1.0mm<sup>2</sup>

Item number: 10-40557AU

Product weight (kg): 0.001 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1                  |
| Wire section [AWG]:               | 16                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 3.1 |
| D2 Ø [mm]: | 2.9 |
| D3 Ø [mm]: | 1.6 |
| d1 Ø [mm]: | 1.8 |
| L1 [mm]:   | 32  |
| T1 [mm]:   | 6.4 |




## Pin contact size 4, 10mm<sup>2</sup>

Item number: 10-660-4-10G10

Product weight (kg): 0.0127 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                  |                      |
|----------------------------------|----------------------|
| Contact type:                    | Pin                  |
| Contact Material:                | CU alloy             |
| Protective layer:                | Silver plated, 3.5µm |
| Connection type:                 | Crimp                |
| Wire section [mm <sup>2</sup> ]: | 10                   |
| Wire section [AWG]:              | 6                    |
| Stripping length [mm]:           | 13                   |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 6.5  |
| D3 Ø [mm]: | 5.7  |
| d1 Ø [mm]: | 4.6  |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |

## Pin contact size 16, 0.25 -0.5mm<sup>2</sup>

Item number: 10-40557-05AU

Product weight (kg): 0.0009 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.25 - 0.5         |
| Wire section [AWG]:               | 22 - 20            |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.15 |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.1  |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |

## Pin contact size 16, 1.5mm<sup>2</sup>

Item number: 10-40557-20-1AU

Product weight (kg): 0.001 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1.5                |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.62 |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.75 |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |

## Pin contact size 4, 16mm<sup>2</sup>

Item number: 10-660-4-16G62

Product weight (kg): 0.0154 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Pin                  |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 16                   |
| Stripping length [mm]:            | 13                   |

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 9.3  |
| D3 Ø [mm]: | 5.7  |
| d1 Ø [mm]: | 6.2  |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |




## Pin contact size 4, 16mm<sup>2</sup>

Item number: 10-660-4-16G10

Product weight (kg): 0.0136 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Pin                  |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 16                   |
| Wire section [AWG]:               | 4 - 3                |
| Stripping length [mm]:            | 13                   |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 9.3  |
| D3 Ø [mm]: | 5.7  |
| d1 Ø [mm]: | 7    |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |

## Pin contact size 16, 0.75mm<sup>2</sup>

Item number: 10-40557-075AU

Product weight (kg): 0.0009 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Pin                |
| Maximum current (short-term) [A]: | 22                 |
| Test current [A]:                 | 20                 |
| Rated current (continuous) [A]:   | 13                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.75               |
| Wire section [AWG]:               | 18                 |
| Stripping length [mm]:            | 7                  |

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 3.1  |
| D2 Ø [mm]: | 2.2  |
| D3 Ø [mm]: | 1.6  |
| d1 Ø [mm]: | 1.35 |
| L1 [mm]:   | 32   |
| T1 [mm]:   | 6.4  |