


# Plug with bayonet coupling nut

Series GB

Item number: GB60-40-31SN-EAC

Product weight (kg): 0.1789 kg

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 40                 |
| Contact type:                             | Socket             |
| Number of coding options:                 | 4                  |
| Number of contacts:                       | 31                 |
| Number of contacts, size 12:              | 31                 |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [°C]:               | -55 - +125         |
| Temperature shock [°C]:                   | -55 - +125         |

## MECHANICAL PROPERTIES

Conductivity (MΩ): Non conductive

EMI: No

Material sealing ring: Silicone

Coupling-torque to lock [Nm]: max. 10.0

Coupling-torque to open [Nm]: min. 5.9

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF / thermoplastic

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 1250

Operating voltage AC [V]: 900

Test voltage AC [V]: 2800

Insulation resistance (MΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 4.8

Voltage class: MIL-DTL-5015

## ELECTRICAL PROPERTIES CONTACTS

Size 12 - rated current (continuous) [A]: 23

Size 12 - maximum current (short-term) [A]: 41


Size 12 - test current [A]: 35

## STANDARDS

Fire protection class EN 45545-2:

R23/HL3

## DIMENSIONS

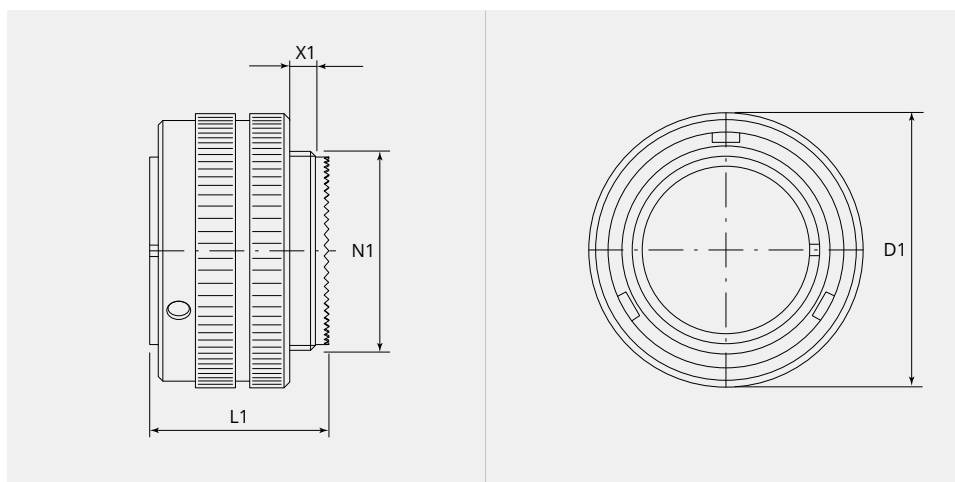

## DIMENSIONS


|            |                  |
|------------|------------------|
| D1 Ø [mm]: | 73               |
| L1 [mm]:   | 38.5             |
| N1:        | 2 5/16"-16 UN 2A |
| X1 [mm]:   | 11.3             |

# Socket contact size 12, 0.5mm<sup>2</sup>

Item number: 10-40560-11AU

Product weight (kg): 0.0031 kg


Packing unit:



## MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.5                |
| Wire section [AWG]:               | 20                 |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |     |
|------------|-----|
| D1 Ø [mm]: | 4.8 |
| D2 Ø [mm]: | 3   |
| d1 Ø [mm]: | 1.1 |
| d2 Ø [mm]: | 2.4 |
| L1 [mm]:   | 38  |
| T1 [mm]:   | 8.5 |

# Socket contact size 12, 1.5mm<sup>2</sup>

Item number: 10-40560-18AU

Product weight (kg): 0.0033 kg


Packing unit:



## MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 1.5                |
| Wire section [AWG]:               | 18 - 16            |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 1.75 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 4.0mm<sup>2</sup>

Item number: 10-40560-30AU

Product weight (kg): 0.0035 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 4                  |
| Wire section [AWG]:               | 12 - 10            |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 2.95 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 2.5mm<sup>2</sup>

Item number: 10-40560-22AU

Product weight (kg): 0.0033 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 2.5                |
| Wire section [AWG]:               | 14                 |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 2.25 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 6.0mm<sup>2</sup>

Item number: 10-40560-38AU

Product weight (kg): 0.0033 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 6                  |
| Wire section [AWG]:               | 10                 |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 3.5  |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 0.75 - 1.0mm<sup>2</sup>

Item number: 10-40560-15AU

Product weight (kg): 0.0032 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                    |
|-----------------------------------|--------------------|
| Contact type:                     | Socket             |
| Maximum current (short-term) [A]: | 41                 |
| Test current [A]:                 | 35                 |
| Rated current (continuous) [A]:   | 23                 |
| Contact Material:                 | CU alloy           |
| Protective layer:                 | Gold plated, 0.5µm |
| Connection type:                  | Crimp              |
| Wire section [mm <sup>2</sup> ]:  | 0.75 - 1.0         |
| Wire section [AWG]:               | 22 - 18            |
| Stripping length [mm]:            | 9                  |

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.35 |
| d1 Ø [mm]: | 1.45 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |