

# Plug with rubber coated coupling nut, short version

Series GB

Item number: GB603-40-A14SN-EAC

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 40                 |
| Contact type:                             | Socket             |
| Number of coding options:                 | 3                  |
| Number of contacts:                       | 14                 |
| Number of contacts, size 4:               | 8                  |
| Number of contacts, size 12:              | 6                  |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |

## MECHANICAL PROPERTIES

|                               |                |
|-------------------------------|----------------|
| Operation temperature [°C]:   | -55 - +125     |
| Temperature shock [°C]:       | -55 - +125     |
| Conductivity (MΩ):            | Non conductive |
| EMI:                          | No             |
| Material sealing ring:        | Silicone       |
| Coupling-torque to lock [Nm]: | max. 10.0      |
| Coupling-torque to open [Nm]: | min. 5.9       |

## THERMAL PROPERTIES

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Material contact insert:           | Ethylene acrylate GXF / thermoplastic |
| Operating temperature insert [°C]: | -55 - +150                            |

## ELECTRICAL PROPERTIES

|                                    |              |
|------------------------------------|--------------|
| Operating voltage DC [V]:          | 700          |
| Operating voltage AC [V]:          | 500          |
| Test voltage AC [V]:               | 2000         |
| Insulation resistance (mΩ):        | ≥ 5000       |
| Insulation creepage distance [mm]: | ≥ 3.2        |
| Voltage class:                     | MIL-DTL-5015 |



## ELECTRICAL PROPERTIES CONTACTS

|                                             |     |
|---------------------------------------------|-----|
| Size 4 - rated current (continuous) [A]:    | 80  |
| Size 4 - maximum current (short-term) [A]:  | 135 |
| Size 4 - test current [A]:                  | 110 |
| Size 12 - rated current (continuous) [A]:   | 23  |
| Size 12 - maximum current (short-term) [A]: | 41  |
| Size 12 - test current [A]:                 | 35  |

## STANDARDS

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

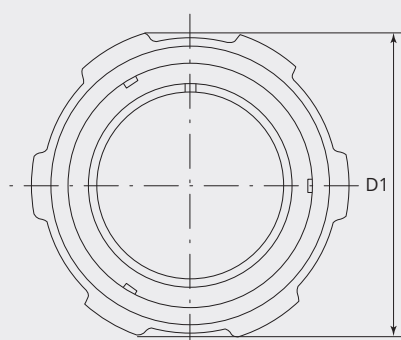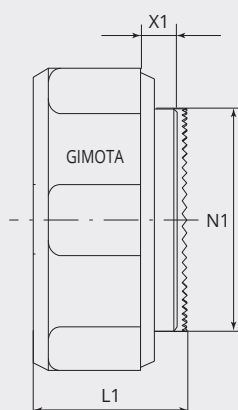

## DIMENSIONS

|            |                  |
|------------|------------------|
| D1 Ø [mm]: | 84               |
| L1 [mm]:   | 38.5             |
| N1:        | 2 5/16"-16 UN 2A |
| X1 [mm]:   | 11.3             |

## Socket contact size 4, 6.0mm<sup>2</sup>

Item number: 10-903-4-6G10

Product weight (kg): 0.0153 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Socket               |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 6                    |
| Wire section [AWG]:               | 8                    |
| Stripping length [mm]:            | 9                    |

## DIMENSIONS

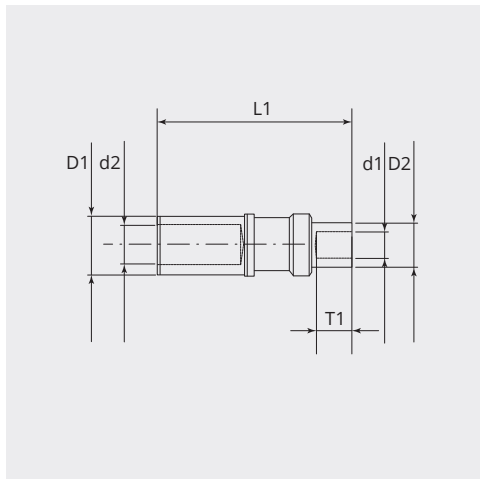

## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 11  |
| D2 Ø [mm]: | 5.2 |
| d1 Ø [mm]: | 3.6 |
| d2 Ø [mm]: | 5.7 |
| L1 [mm]:   | 41  |
| T1 [mm]:   | 8.5 |

## Socket contact size 4, 16mm<sup>2</sup>

Item number: 10-903-4-16G62

Product weight (kg): 0.0184 kg


Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Socket               |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 16                   |
| Stripping length [mm]:            | 13                   |

## DIMENSIONS

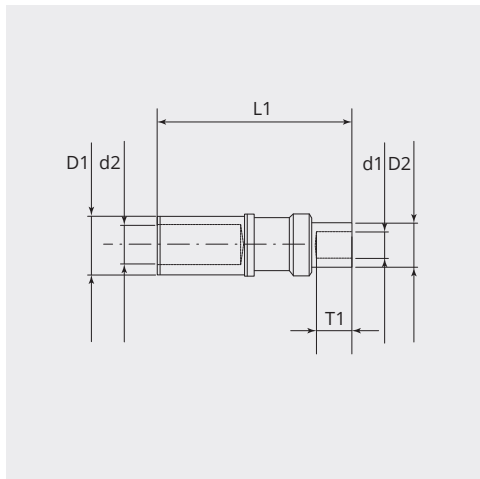

## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 9.3  |
| d1 Ø [mm]: | 6.2  |
| d2 Ø [mm]: | 5.7  |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |

## Socket contact size 4, 16mm<sup>2</sup>

Item number: 10-903-4-16G10

Product weight (kg): 0.0171 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

|                                   |                      |
|-----------------------------------|----------------------|
| Contact type:                     | Socket               |
| Maximum current (short-term) [A]: | 135                  |
| Test current [A]:                 | 110                  |
| Rated current (continuous) [A]:   | 80                   |
| Contact Material:                 | CU alloy             |
| Protective layer:                 | Silver plated, 3.5µm |
| Connection type:                  | Crimp                |
| Wire section [mm <sup>2</sup> ]:  | 16                   |
| Wire section [AWG]:               | 4 - 3                |
| Stripping length [mm]:            | 13                   |

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 9.3  |
| d1 Ø [mm]: | 7    |
| d2 Ø [mm]: | 5.7  |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |

## Socket contact size 12, 2.5mm<sup>2</sup>

Item number: 10-40560-22AU

Product weight (kg): 0.0033 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 2.5

Wire section [AWG]: 14

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS


|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 2.25 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 4, 10mm<sup>2</sup>

Item number: 10-903-4-10G10

Product weight (kg): 0.016 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 135

Test current [A]: 110

Rated current (continuous) [A]: 80

Contact Material: CU alloy

Protective layer: Silver plated, 3.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 10

Wire section [AWG]: 6

Stripping length [mm]: 13

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 11   |
| D2 Ø [mm]: | 6.5  |
| d1 Ø [mm]: | 4.6  |
| d2 Ø [mm]: | 5.7  |
| L1 [mm]:   | 41   |
| T1 [mm]:   | 12.2 |

## Socket contact size 12, 1.5mm<sup>2</sup>

Item number: 10-40560-18AU

Product weight (kg): 0.0033 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 1.5

Wire section [AWG]: 18 - 16

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 1.75 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 0.5mm<sup>2</sup>

Item number: 10-40560-11AU

Product weight (kg): 0.0031 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.5

Wire section [AWG]: 20

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 4.8 |
| D2 Ø [mm]: | 3   |
| d1 Ø [mm]: | 1.1 |
| d2 Ø [mm]: | 2.4 |
| L1 [mm]:   | 38  |
| T1 [mm]:   | 8.5 |

## Socket contact size 12, 6.0mm<sup>2</sup>

Item number: 10-40560-38AU

Product weight (kg): 0.0033 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 6

Wire section [AWG]: 10

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 3.5  |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 4.0mm<sup>2</sup>

Item number: 10-40560-30AU

Product weight (kg): 0.0035 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 4

Wire section [AWG]: 12 - 10

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 2.95 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 0.75 - 1.0mm<sup>2</sup>

Item number: 10-40560-15AU

Product weight (kg): 0.0032 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.75 - 1.0

Wire section [AWG]: 22 - 18

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.35 |
| d1 Ø [mm]: | 1.45 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |