

GCMH-24SF-I

Cable feedthrough with foamed-in TPE seal

Item number: GCMH-24SF-I

Packing unit: 1





TECHNICAL CHARACTERISTICS

Material:	Polyamide PA6.6
Glass fibre reinforced:	Yes
Halogen-free:	Yes
Silicone-free:	Yes
Sealing material:	TPE
Colour:	Black
Mounting type:	Screw
Number of screw holes:	4
Fastening screw torque [Nm]:	3
Working temperature min. [°C]:	-40
Working temperature max. [°C]:	+120
Flammability rating UL 94:	V0

TECHNICAL CHARACTERISTICS

Fire protection class EN 45545-2:	R22:HL1/HL2/HL3 R23: HL1/HL2/HL3
Protection class EN 60529:	IP66
RoHS-compliant:	Yes
REACH-compliant:	Yes

DIMENSIONS

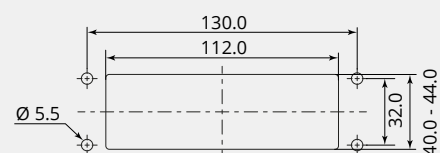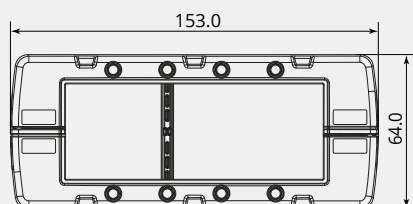

DIMENSIONS

Width [mm]:	64
Height [mm]:	24.2
Construction height [mm]:	24.2
Length [mm]:	153



DIMENSIONS

Cut-out width [mm]:	40 - 45
---------------------	---------

Cut-out length [mm]:	112
----------------------	-----

Screw Ø [mm]:	5.5
---------------	-----