

Pin contact 10A, 0.25mm²

Item number: GMRC-PDC-0.25AU
Product weight (kg): 0.0006 kg
Packing unit: 100




MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Rated current (continuous) [A]:	10
Contact resistance (mΩ) :	≤3
Contact Material:	CU alloy
Coating:	Gold
Protective layer:	Gold plated
Type of manufacture:	Turned
Connection type:	Crimp
Wire section [mm ²]:	0.09 - 0.25
Wire section [AWG]:	28 - 24
Stripping length [mm]:	5
REACH-compliant:	SVHC substances, yes - Lead
RoHS-compliant:	Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

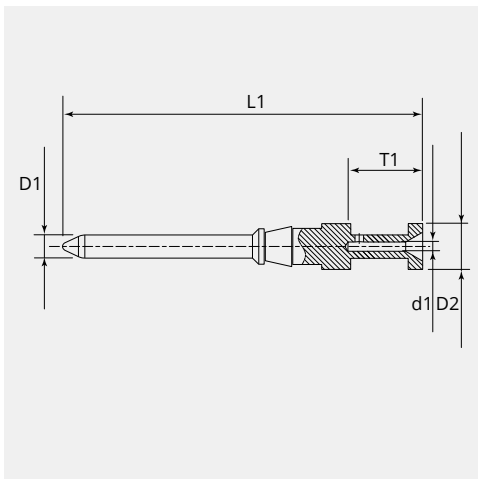

DIMENSIONS

D1 Ø [mm]:	1.58
D2 Ø [mm]:	3.2
d1 Ø [mm]:	0.65
L1 [mm]:	25.0
T1 [mm]:	5.2