

Pin contact 16A, 0.75mm²

Item number: GMRC-PEC-0.75AU

Packing unit: 100



MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Rated current (continuous) [A]: 16

Contact resistance (mΩ) : ≤1

Contact Material: CU alloy

Coating: Gold

Protective layer: Gold plated

Type of manufacture: Turned

Connection type: Crimp

Wire section [mm²]: 0.75

Wire section [AWG]: 18

Stripping length [mm]: 7.5


REACH-compliant: SVHC substances, yes - Lead

RoHS-compliant: Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

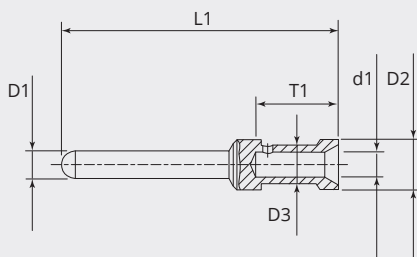

DIMENSIONS

D1 Ø [mm]:	2.5
D2 Ø [mm]:	4.5
D3 Ø [mm]:	2.6
d1 Ø [mm]:	1.3
L1 [mm]:	25.0
T1 [mm]:	7.5