

Pin contact 200A, 35mm²

Item number: GMRC-PHC-35AG

Packing unit: 1




MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Rated current (continuous) [A]:	200
Contact resistance (mΩ) :	≤0.3
Contact Material:	CU alloy
Coating:	Silver
Protective layer:	Silver plated
Type of manufacture:	Turned
Connection type:	Crimp
Wire section [mm ²]:	35
Stripping length [mm]:	22.5
Max. cable insulation diameter [mm]:	18
REACH-compliant:	SVHC substances, yes - Lead
RoHS-compliant:	Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

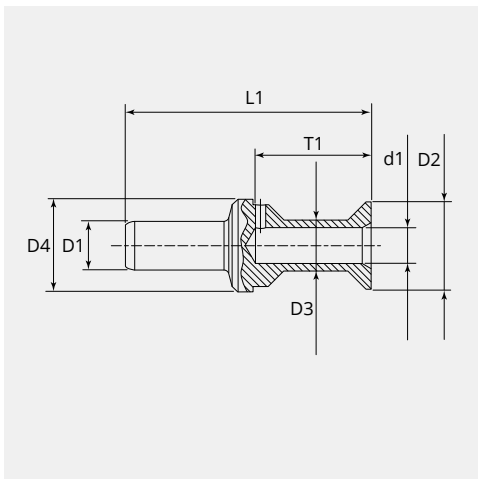

DIMENSIONS

D1 Ø [mm]:	9.5
D2 Ø [mm]:	17.0
D3 Ø [mm]:	12.5
D4 Ø [mm]:	18.0
d1 Ø [mm]:	8.2
L1 [mm]:	47.7
T1 [mm]:	22.5