

Pin contact 70A, 25mm²

Item number: GMRC-PK70C-25AG

Packing unit: 5




MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Rated current (continuous) [A]:	70
Contact resistance (mΩ) :	≤0.5
Contact Material:	CU alloy
Coating:	Silver
Protective layer:	Silver plated
Type of manufacture:	Turned
Connection type:	Crimp
Wire section [mm ²]:	25
Stripping length [mm]:	15
Max. cable insulation diameter [mm]:	11
REACH-compliant:	SVHC substances, yes - Lead
RoHS-compliant:	Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

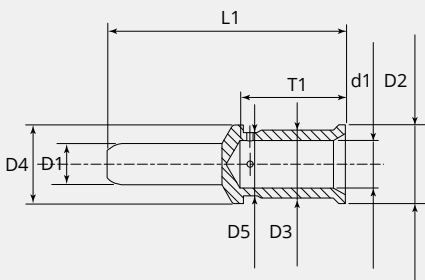

DIMENSIONS

D1 Ø [mm]:	6
D2 Ø [mm]:	11.5
D3 Ø [mm]:	10.0
D4 Ø [mm]:	11.5
D5 Ø (mm):	9.3
d1 Ø [mm]:	7.0
L1 [mm]:	35.0
T1 [mm]:	15.5