

Pin contact 70A, 6mm²

Item number: GMRC-PK70C-6AG

Packing unit: 5



MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Rated current (continuous) [A]: 70

Contact resistance (mΩ) : ≤0.5

Contact Material: CU alloy

Coating: Silver

Protective layer: Silver plated

Type of manufacture: Turned

Connection type: Crimp

Wire section [mm²]: 6

Stripping length [mm]: 15.5

Max. cable insulation diameter [mm]: 11


REACH-compliant: SVHC substances, yes - Lead

RoHS-compliant: Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

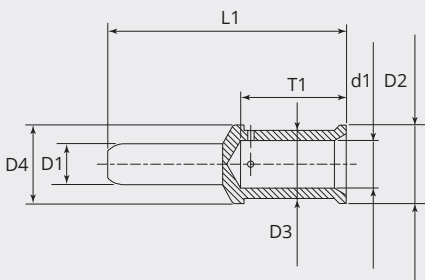

DIMENSIONS

D1 Ø [mm]:	6
D2 Ø [mm]:	11.5
D3 Ø [mm]:	5.0
D4 Ø [mm]:	11.5
d1 Ø [mm]:	3.5
L1 [mm]:	35.0
T1 [mm]:	15.5