

Pin contact 10A, 0.37mm²

Item number: GMRC-PZC-0.37AU
Product weight (kg): 0.0007 kg
Packing unit: 100




MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Rated current (continuous) [A]:	10
Contact resistance (mΩ) :	≤3
Contact Material:	CU alloy
Coating:	Gold
Protective layer:	Gold plated
Type of manufacture:	Turned
Connection type:	Crimp
Wire section [mm ²]:	0.14 - 0.37
Wire section [AWG]:	26 - 22
Stripping length [mm]:	6
REACH-compliant:	SVHC substances, yes - Lead
RoHS-compliant:	Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

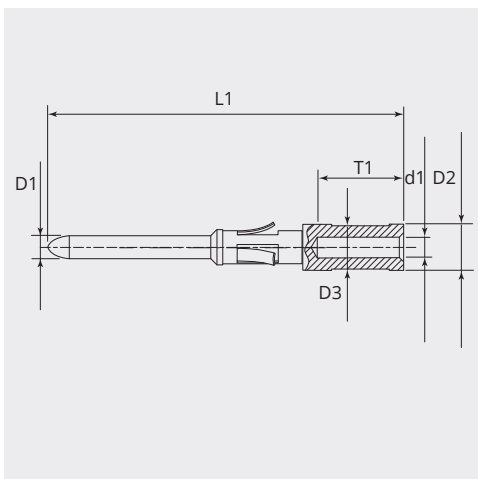

DIMENSIONS

D1 Ø [mm]:	1.6
D2 Ø [mm]:	3.2
D3 Ø [mm]:	2.6
d1 Ø [mm]:	0.9
L1 [mm]:	24.7
T1 [mm]:	6.0