

Pin contact 10A, 1.5mm²

Item number: GMRC-PZC-1.5AU

Product weight (kg): 0.0009 kg

Packing unit: 100



MECHANICAL PROPERTIES CONTACTS

Contact type: Pin

Rated current (continuous) [A]: 10

Contact resistance (mΩ) : ≤3

Contact Material: CU alloy

Coating: Gold

Protective layer: Gold plated

Type of manufacture: Turned

Connection type: Crimp

Wire section [mm²]: 1.5

Wire section [AWG]: 16

Stripping length [mm]: 6


REACH-compliant: SVHC substances, yes - Lead

RoHS-compliant: Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

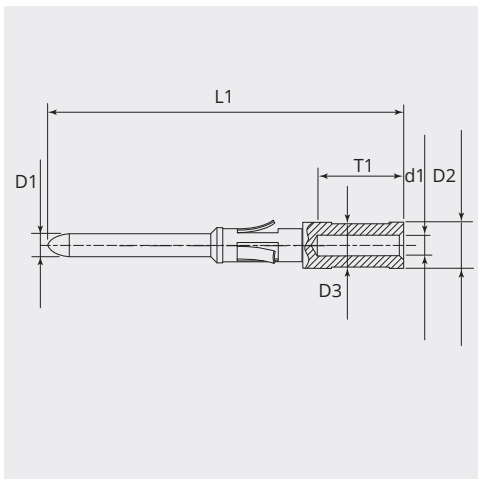

DIMENSIONS

D1 Ø [mm]:	1.6
D2 Ø [mm]:	3.2
D3 Ø [mm]:	3.0
d1 Ø [mm]:	1.75
L1 [mm]:	24.7
T1 [mm]:	6.0