

Socket contact 100A, 16mm²

Item number: GMRC-SKC-16AG

Product weight (kg): 0.0157 kg

Packing unit: 5




MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket
Rated current (continuous) [A]:	100
Contact resistance (mΩ) :	≤0.3
Contact Material:	CU alloy
Coating:	Silver
Protective layer:	Silver plated
Type of manufacture:	Turned
Connection type:	Crimp
Wire section [mm ²]:	16
Stripping length [mm]:	19
REACH-compliant:	SVHC substances, yes - Lead
RoHS-compliant:	Compliant with exception 6c (copper alloy ≤ 4% lead)

STANDARDS

RoHS-compliant:	Compliant with exception 6c (copper alloy $\leq 4\%$ lead)
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

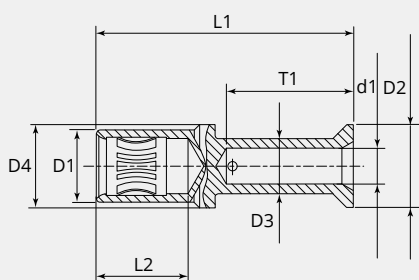

DIMENSIONS

D1 Ø [mm]:	11
D2 Ø [mm]:	12.7
D3 Ø [mm]:	8.5
D4 Ø [mm]:	12.7
d1 Ø [mm]:	5.5
L1 [mm]:	39.5
L2 [mm]:	14.0
T1 [mm]:	19.5