


Base housing 24 B

4 x M20 thread, top entry

Item number: GMRH-24BS-BBK-090-TEH-4M20

Packing unit: 1

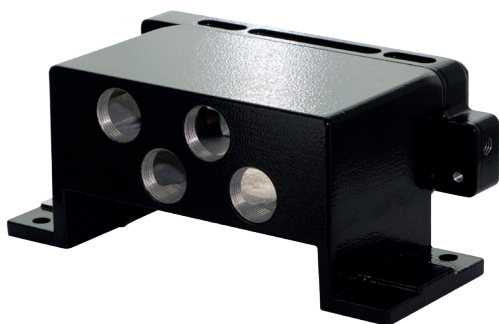

TECHNICAL CHARACTERISTICS

Shell material: Aluminium die-cast

Surface: Powder-coated

Surface colour: RAL 9005 (jet black)

Locking mode: Screw locking


TECHNICAL CHARACTERISTICS

Operation temperature [°C]:	-40 - +125
Material sealing ring:	Nitrile Butadiene Rubber (NBR)
Number of slots:	6 modules
Top entry horizontal (TEH):	4 x M20
Cable strain relief:	Cable gland

STANDARDS

Protection class EN 60529:	IP69
RoHS-compliant:	Compliant acc. to 2015/863/EU (RoHS II), Annex II
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

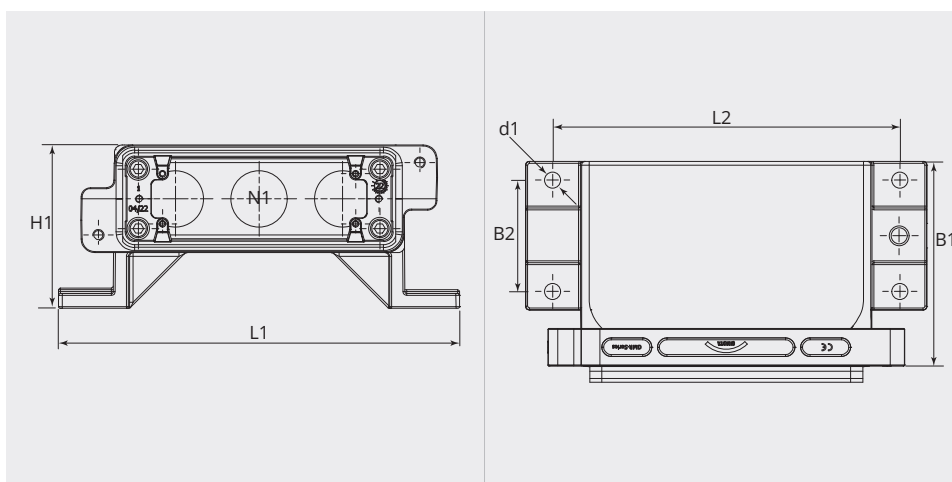



DIMENSIONS

B1 [mm]:	110.4
B2 [mm]:	60
d1 Ø [mm]:	8.5
Height [mm]:	88
L1 [mm]:	216
L2 [mm]:	187
N1:	M20x1.5