

Base housing size 24 B

1 x M40 thread, lateral, vertical

Item number: GMRH-24BS-BBK-180-SEV-1M40

Packing unit: 1



TECHNICAL CHARACTERISTICS

Shell material:	Aluminium die-cast
Surface:	Powder-coated
Surface colour:	RAL 9005 (jet black)
Locking mode:	Screw locking


TECHNICAL CHARACTERISTICS

Operation temperature [°C]:	-40 - +125
Material sealing ring:	Nitrile Butadiene Rubber (NBR)
Number of slots:	6 modules
Side entry vertical (SEV):	1 x M40
Cable strain relief:	Cable gland

STANDARDS

Protection class EN 60529:	IP69
RoHS-compliant:	Compliant acc. to 2015/863/EU (RoHS II), Annex II
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

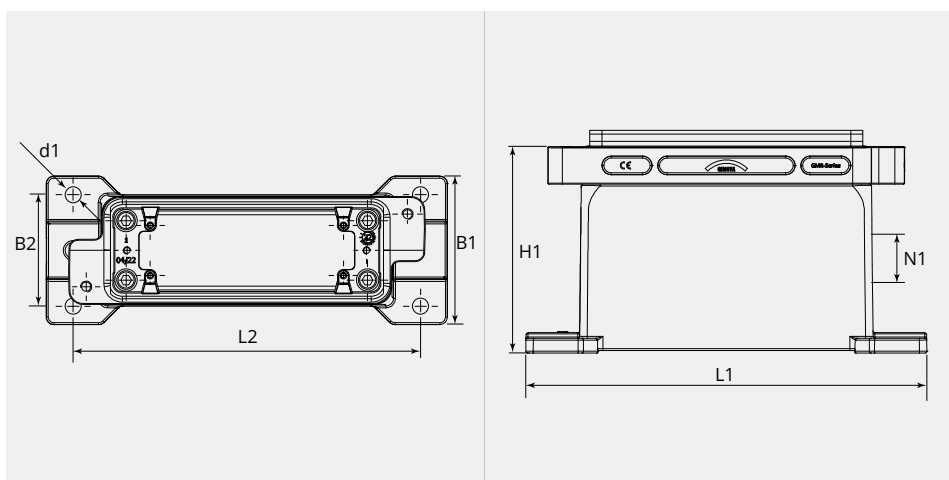

DIMENSIONS

B1 [mm]:	110.4
B2 [mm]:	60
d1 Ø [mm]:	8.5
Height [mm]:	88
L1 [mm]:	216
L2 [mm]:	187
N1:	M40x1.5