
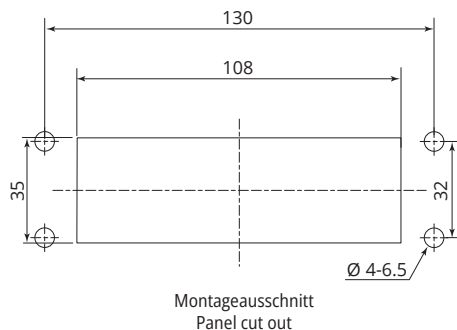


Bulkhead mounted housing, size 24 B

Insert mounted from the front

Item number: GMRH-24BS-BK-IF
Product weight (kg): 0.2418 kg
Packing unit: 1

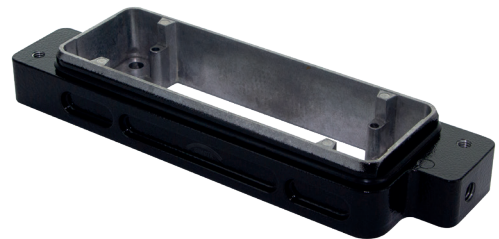

TECHNICAL CHARACTERISTICS

Number of slots:	6 modules
Shell material:	Aluminium die-cast
Surface:	Powder-coated
Surface colour:	RAL 9005 (jet black)


TECHNICAL CHARACTERISTICS

Locking mode:	Screw locking
Operation temperature [°C]:	-40 - +125
Material sealing ring:	Nitrile Butadiene Rubber (NBR)
Number of slots:	6 modules
Earth connection:	Yes

STANDARDS

Protection class EN 60529:	IP69
RoHS-compliant:	Compliant acc. to 2015/863/EU (RoHS II), Annex II
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

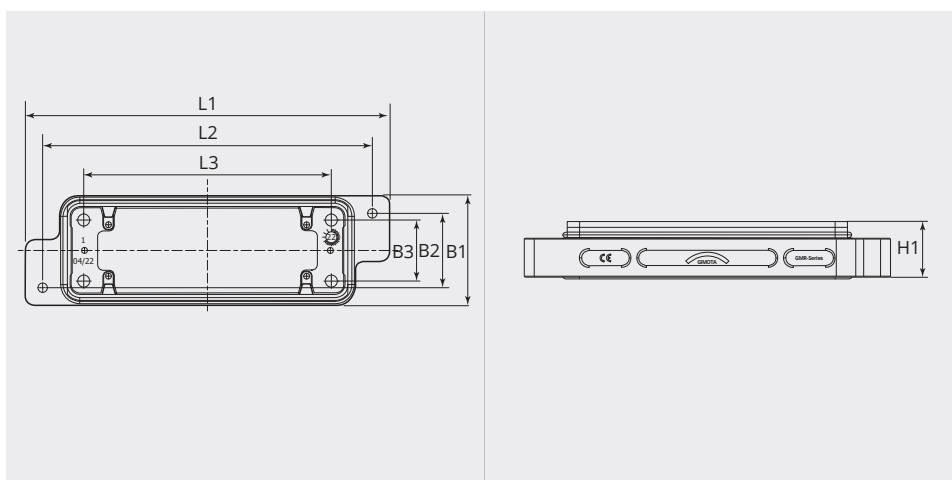

DIMENSIONS

B1 [mm]:	58
B2 [mm]:	39
B3 [mm]:	32
Height [mm]:	29
L1 [mm]:	192
L2 [mm]:	173
L3 [mm]:	130