

Hood size 24 B

3 x M32 thread, top entry

Item number: GMRH-24BS-HP-TEH-2M32

Product weight (kg): 0.6661 kg

Packing unit: 1




TECHNICAL CHARACTERISTICS

Shell material:	Aluminium die-cast
Surface:	Powder-coated
Surface colour:	RAL 9005 (jet black)
Locking mode:	Screw locking
Operation temperature [°C]:	-40 - +125
Material sealing ring:	Nitrile Butadiene Rubber (NBR)
Number of slots:	6 modules
No. of cable entrances:	2
Top entry horizontal (TEH):	3 x M32
Cable strain relief:	Cable gland

STANDARDS

Protection class EN 60529:	IP69
RoHS-compliant:	Compliant acc. to 2015/863/EU (RoHS II), Annex II
REACH-compliant:	SVHC substances, yes - Lead

DIMENSIONS

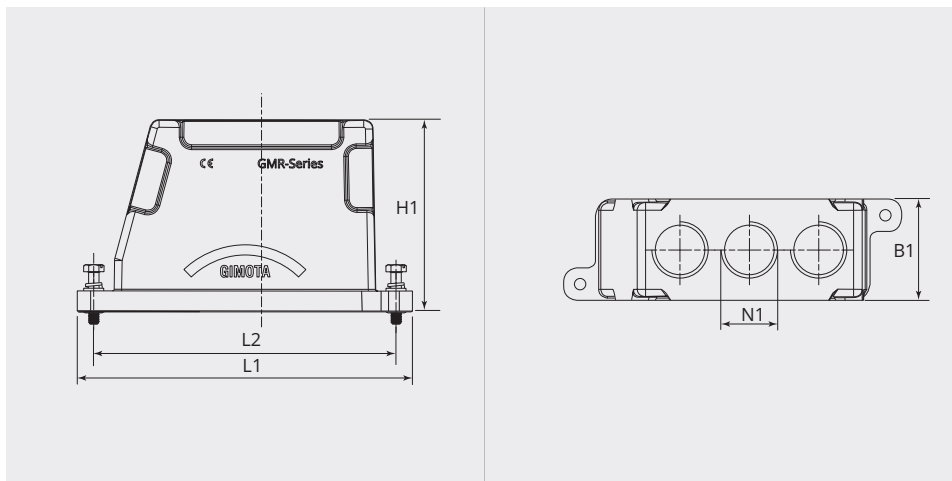

DIMENSIONS

B1 [mm]:	58.0
d1 Ø [mm]:	M32 x 1.5
Height [mm]:	110
L1 [mm]:	192.0
L2 [mm]:	173.0
N1:	M32x1.5