

# Hood size 24 B

2 x M40 thread, top entry

Item number: GMRH-24BS-HP-TEH-2M40

Product weight (kg): 0.6661 kg

Packing unit: 1




## TECHNICAL CHARACTERISTICS

|                             |                                |
|-----------------------------|--------------------------------|
| Shell material:             | Aluminium die-cast             |
| Surface:                    | Powder-coated                  |
| Surface colour:             | RAL 9005 (jet black)           |
| Locking mode:               | Screw locking                  |
| Operation temperature [°C]: | -40 - +125                     |
| Material sealing ring:      | Nitrile Butadiene Rubber (NBR) |
| Number of slots:            | 6 modules                      |
| No. of cable entrances:     | 2                              |
| Top entry horizontal (TEH): | 2 x M40                        |
| Cable strain relief:        | Cable gland                    |

## STANDARDS

|                            |                                                   |
|----------------------------|---------------------------------------------------|
| Protection class EN 60529: | IP69                                              |
| RoHS-compliant:            | Compliant acc. to 2015/863/EU (RoHS II), Annex II |
| REACH-compliant:           | SVHC substances, yes - Lead                       |

## DIMENSIONS

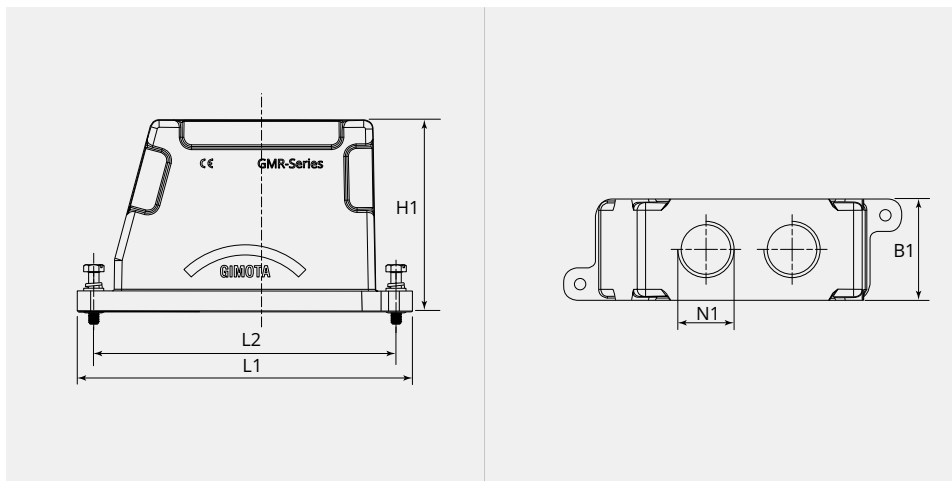

## DIMENSIONS

|              |           |
|--------------|-----------|
| B1 [mm]:     | 58.0      |
| d1 Ø [mm]:   | M40 x 1.5 |
| Height [mm]: | 110       |
| L1 [mm]:     | 192.0     |
| L2 [mm]:     | 173.0     |
| N1:          | M40x1.5   |