


Module 2 pole,socket, 5000V, 40A

Number of slots: 2

Item number: GMRM-5000-40-2SCC-02

Packing unit: 1

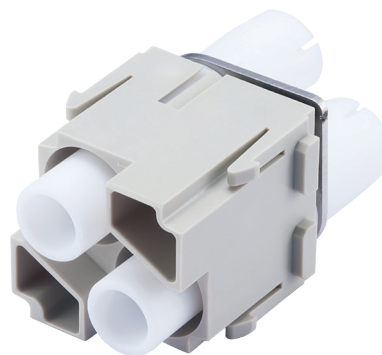

TECHNICAL CHARACTERISTICS

Number of slots:	2
Number of contacts:	2
Contact type:	Socket
Max. cable insulation Ø [mm]:	9
Number of mating cycles (min.):	500

THERMAL PROPERTIES

Material contact insert:	Polycarbonate (PC) / Polytetrafluoroethylene (PTFE)
Operating temperature insert [°C]:	-40 - +125


ELECTRICAL PROPERTIES

Rated current [A]:	40
Operating voltage [V]:	5000 / 2900
Test voltage DC [V]:	15
Insulation resistance (Ω):	$\geq 10^{10}$
Pollution degree:	3

STANDARDS

Fire protection class EN 45545-2:	R22/HL1,HL2 R23,24/HL1,HL2,HL3
Flammability rating UL 94:	V0
RoHS-compliant:	Compliant
REACH-compliant:	SVHC substances, no

DIMENSIONS

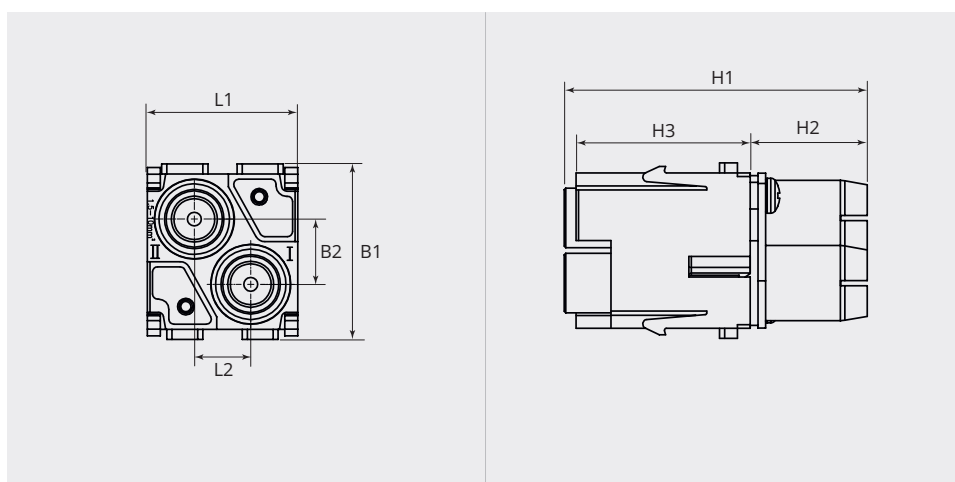

DIMENSIONS

B1 [mm]:	34.2
B2 [mm]:	12.7
Height [mm]:	62
H2 [mm]:	34
H3 [mm]:	24.8
L1 [mm]:	29.3
L2 [mm]:	11.0