

Plug with rubber coated coupling nut, for EMI applications

Series GR

Item number: GR604-32-1SN-EAA

Packing unit: 1



MECHANICAL PROPERTIES

Size:	32
Contact type:	Socket
Number of coding options:	4
Number of contacts:	5
Number of contacts, size 0:	2
Number of contacts, size 12:	3
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	12-15 μ
Surface colour:	Black
Corrosion resistance [h]:	200

MECHANICAL PROPERTIES

Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125
Conductivity (MΩ):	≤ 0.5
EMI:	Yes
Coupling-torque to lock [Nm]:	max. 8.0
Coupling-torque to open [Nm]:	min. 3.6

THERMAL PROPERTIES

Material contact insert:	Ethylene acrylate GXF
Operating temperature insert [°C]:	-55 - +150

ELECTRICAL PROPERTIES

Contact numbers:	A
Operating voltage DC [V]:	1750
Operating voltage AC [V]:	1250
Test voltage AC [V]:	3500
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 6.3
Voltage class:	MIL-DTL-5015
Contact numbers:	Rest
Operating voltage DC [V]:	1250
Operating voltage AC [V]:	900
Test voltage AC [V]:	2800
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 4.8
Voltage index:	MIL-DTL-5015

ELECTRICAL PROPERTIES CONTACTS


Size 0 - rated current (continuous) [A]:	150
Size 0 - maximum current (short-term) [A]:	245
Size 0 - test current [A]:	200
Size 0* - rated current (continuous) [A]:	240
Size 0* - maximum current (short-term) [A]:	200
Size 0* - test current [A]:	245
Size 12 - rated current (continuous) [A]:	23
Size 12 - maximum current (short-term) [A]:	41
Size 12 - test current [A]:	35

STANDARDS

Fire protection class EN 45545-2:

R23/HL3

DIMENSIONS

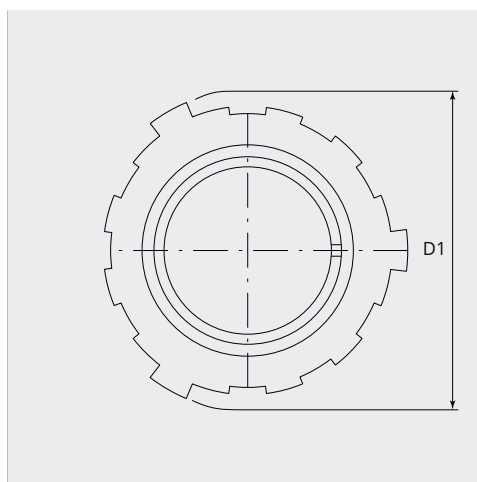

DIMENSIONS

D1 Ø [mm]:	76
L1 [mm]:	41.0
N1:	17/8"-16 UN 2A
X1 [mm]:	10.5

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007

Socket contact size 12, 1.5mm²

Item number: 10-40560-18AU

Product weight (kg): 0.0033 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket
---------------	--------

Maximum current (short-term) [A]:	41
-----------------------------------	----

Test current [A]:	35
-------------------	----

Rated current (continuous) [A]:	23
---------------------------------	----

Contact Material:	CU alloy
-------------------	----------

Protective layer:	Gold plated, 0.5µm
-------------------	--------------------

Connection type:	Crimp
------------------	-------

Wire section [mm ²]:	1.5
----------------------------------	-----

Wire section [AWG]:	18 - 16
---------------------	---------

Stripping length [mm]:	9
------------------------	---

DIMENSIONS




DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.95
d1 Ø [mm]:	1.75
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5

Socket contact size 0*, 16mm²

Item number: 10-905-0-162G62


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket with lamellas for increased current transfer
Maximum current (short-term) [A]:	300
Test current [A]:	240
Rated current (continuous) [A]:	200
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	16
Stripping length [mm]:	17

DIMENSIONS

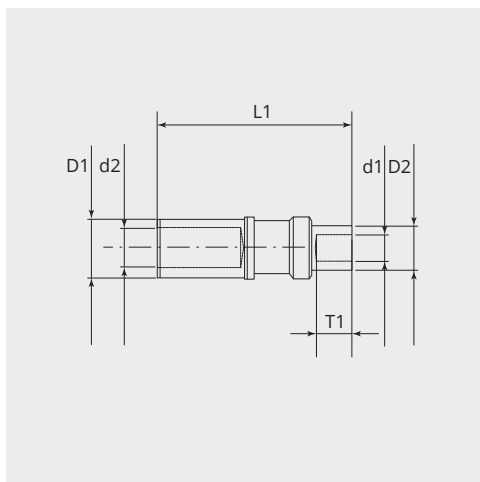

DIMENSIONS


D1 Ø [mm]:	15
D2 Ø [mm]:	9.3
d1 Ø [mm]:	6.2
d2 Ø [mm]:	9.3
L1 [mm]:	50
T1 [mm]:	16

Socket contact size 0*, 50mm²

Item number: 10-905-0-502G10

Product weight (kg): 0.0457 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket with lamellas for increased current transfer

Maximum current (short-term) [A]: 300

Test current [A]: 240

Rated current (continuous) [A]: 200

Contact Material: CU alloy

Protective layer: Silver plated, 3.5µm

Connection type: Crimp

Wire section [mm²]: 50

Wire section [AWG]: 0

Stripping length [mm]: 22

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	14.6
d1 Ø [mm]:	10.5
d2 Ø [mm]:	14.6
L1 [mm]:	55
T1 [mm]:	20.5

Socket contact size 12, 0.5mm²

Item number: 10-40560-11AU

Product weight (kg): 0.0031 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm²]: 0.5

Wire section [AWG]: 20

Stripping length [mm]: 9

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	3
d1 Ø [mm]:	1.1
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5

Socket contact size 12, 6.0mm²

Item number: 10-40560-38AU

Product weight (kg): 0.0033 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm²]: 6

Wire section [AWG]: 10

Stripping length [mm]: 9

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	4.75
d1 Ø [mm]:	3.5
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5

Socket contact size 0, 50mm²

Item number: 10-903-0-502G10

Product weight (kg): 0.0434 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket
Maximum current (short-term) [A]:	245
Test current [A]:	200
Rated current (continuous) [A]:	150
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	50
Wire section [AWG]:	0
Stripping length [mm]:	22

DIMENSIONS

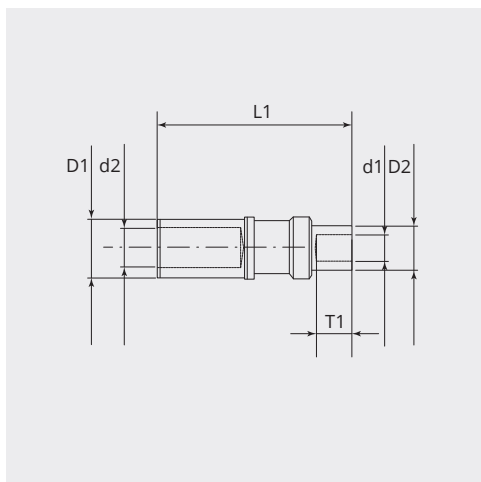

DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	14.6
d1 Ø [mm]:	10.5
d2 Ø [mm]:	14.6
L1 [mm]:	53
T1 [mm]:	20.5

Socket contact size 0, 16mm²

Item number: 10-903-0-162G62

Product weight (kg): 0.0331 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket
Maximum current (short-term) [A]:	245
Test current [A]:	200
Rated current (continuous) [A]:	150
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	16
Stripping length [mm]:	17

DIMENSIONS

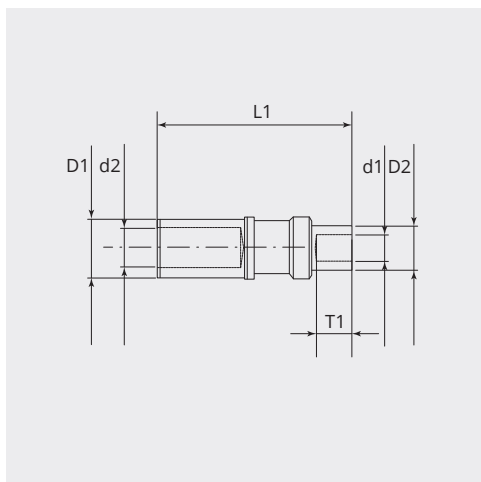


DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	9.3
d1 Ø [mm]:	6.2
d2 Ø [mm]:	9.3
L1 [mm]:	48
T1 [mm]:	16

Socket contact size 0*, 35mm²

Item number: 10-905-0-352G89


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket with lamellas for increased current transfer
Maximum current (short-term) [A]:	300
Test current [A]:	240
Rated current (continuous) [A]:	200
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	35
Wire section [AWG]:	0
Stripping length [mm]:	19

DIMENSIONS

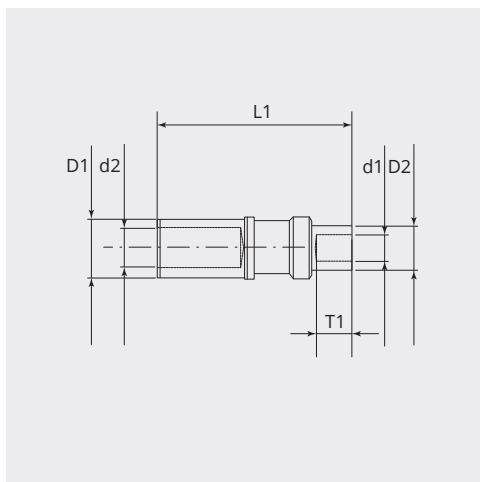

DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	13
d1 Ø [mm]:	8.9
d2 Ø [mm]:	13
L1 [mm]:	52
T1 [mm]:	18

Socket contact size 0, 35mm²

Item number: 10-903-0-352G89

Product weight (kg): 0.0423 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 245

Test current [A]: 200

Rated current (continuous) [A]: 150

Contact Material: CU alloy

Protective layer: Silver plated, 3.5µm


Connection type: Crimp

Wire section [mm²]: 35

Wire section [AWG]: 0

Stripping length [mm]: 19

DIMENSIONS

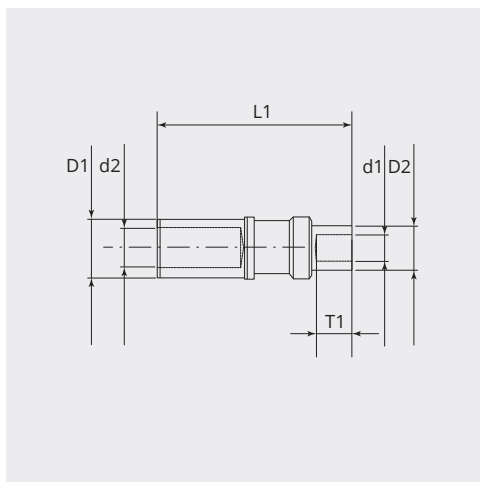

DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	13
d1 Ø [mm]:	8.9
d2 Ø [mm]:	13
L1 [mm]:	52
T1 [mm]:	18

Socket contact size 0, 25mm²

Item number: 10-903-0-252G76

Product weight (kg): 0.0373 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Socket
Maximum current (short-term) [A]:	245
Test current [A]:	200
Rated current (continuous) [A]:	150
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	25
Stripping length [mm]:	18

DIMENSIONS

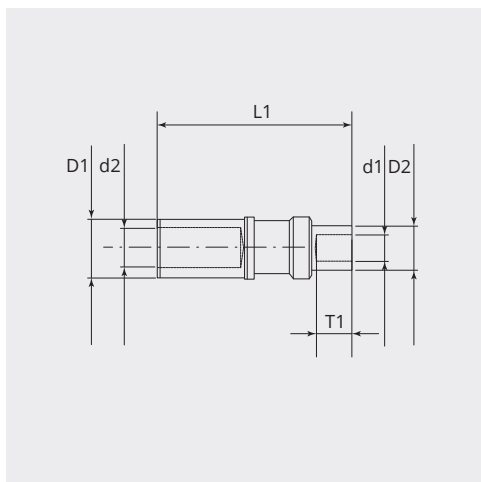


DIMENSIONS

D1 Ø [mm]:	15
D2 Ø [mm]:	11.7
d1 Ø [mm]:	7.6
d2 Ø [mm]:	11.7
L1 [mm]:	49
T1 [mm]:	17

Socket contact size 0*, 25mm²

Item number: 10-905-0-252G76

Packing unit: 100



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket with lamellas for increased current transfer

Maximum current (short-term) [A]: 300

Test current [A]: 240

Rated current (continuous) [A]: 200

Contact Material: CU alloy


Protective layer: Silver plated, 3.5µm

Connection type: Crimp

Wire section [mm²]: 25

Stripping length [mm]: 18

DIMENSIONS

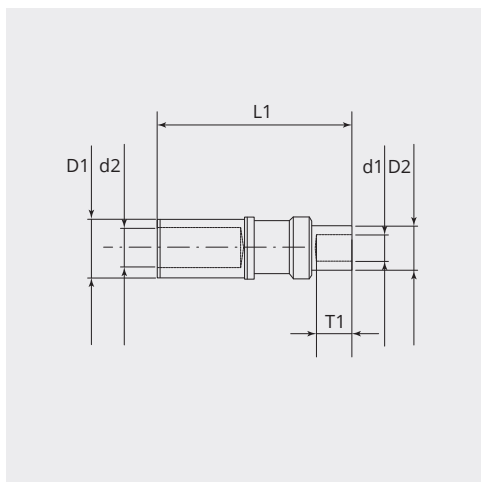

DIMENSIONS


D1 Ø [mm]:	15
D2 Ø [mm]:	11.7
d1 Ø [mm]:	7.6
d2 Ø [mm]:	11.7
L1 [mm]:	51
T1 [mm]:	17

Socket contact size 12, 2.5mm²

Item number: 10-40560-22AU

Product weight (kg): 0.0033 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm²]: 2.5

Wire section [AWG]: 14

Stripping length [mm]: 9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.95
d1 Ø [mm]:	2.25
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5

Socket contact size 12, 0.75 - 1.0mm²

Item number: 10-40560-15AU

Product weight (kg): 0.0032 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm²]: 0.75 - 1.0

Wire section [AWG]: 22 - 18

Stripping length [mm]: 9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.35
d1 Ø [mm]:	1.45
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5

Socket contact size 12, 4.0mm²

Item number: 10-40560-30AU

Product weight (kg): 0.0035 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm


Connection type: Crimp

Wire section [mm²]: 4

Wire section [AWG]: 12 - 10

Stripping length [mm]: 9

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	4.75
d1 Ø [mm]:	2.95
d2 Ø [mm]:	2.4
L1 [mm]:	38
T1 [mm]:	8.5