

# Cable receptacle

Series GS

Item number: GS11-40-A4SN-EAA

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                |
|-------------------------------------------|----------------|
| Size:                                     | 40             |
| Contact type:                             | Socket         |
| Number of contacts:                       | 4              |
| Number of contacts, size 0:               | 4              |
| Shell material:                           | Aluminum alloy |
| Surface:                                  | Zinc           |
| Type of surface:                          | Passivated     |
| Thickness of surface treatment [ $\mu$ ]: | 12-15 $\mu$    |
| Surface colour:                           | Black          |
| Corrosion resistance [h]:                 | 200            |
| Operation temperature [ $^{\circ}$ C]:    | -55 - +90      |
| Temperature shock [ $^{\circ}$ C]:        | -55 - +125     |

## MECHANICAL PROPERTIES

|                               |           |
|-------------------------------|-----------|
| Conductivity (MΩ):            | ≤ 0.5     |
| EMI:                          | Yes       |
| Coupling-torque to lock [Nm]: | max. 10.0 |
| Coupling-torque to open [Nm]: | min. 5.9  |

## THERMAL PROPERTIES

|                                    |                       |
|------------------------------------|-----------------------|
| Material contact insert:           | Ethylene acrylate GXF |
| Operating temperature insert [°C]: | -55 - +150            |

## ELECTRICAL PROPERTIES




|                                    |              |
|------------------------------------|--------------|
| Operating voltage AC [V]:          | 750          |
| Insulation resistance (mΩ):        | ≥ 5000       |
| Voltage class:                     | ABB          |
| Contact numbers:                   | All          |
| Operating voltage DC [V]:          | 1750         |
| Operating voltage AC [V]:          | 1250         |
| Test voltage AC [V]:               | 3500         |
| Insulation resistance (mΩ):        | ≥ 5000       |
| Insulation creepage distance [mm]: | ≥ 6.3        |
| Voltage index:                     | MIL-DTL-5015 |

## ELECTRICAL PROPERTIES CONTACTS

|                                             |     |
|---------------------------------------------|-----|
| Size 0 - rated current (continuous) [A]:    | 150 |
| Size 0 - maximum current (short-term) [A]:  | 245 |
| Size 0 - test current [A]:                  | 200 |
| Size 0* - rated current (continuous) [A]:   | 200 |
| Size 0* - maximum current (short-term) [A]: | 300 |
| Size 0* - test current [A]:                 | 240 |

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

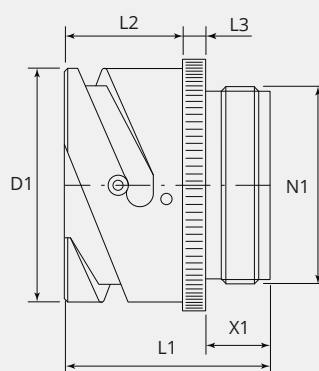

## DIMENSIONS

|            |                  |
|------------|------------------|
| D1 Ø [mm]: | 66               |
| D2 Ø [mm]: | 68.5             |
| L1 [mm]:   | 37.5             |
| L2 [mm]:   | 22.2             |
| L3 [mm]:   | 4.0              |
| N1:        | 2 5/16"-16 UN 2A |
| X1 [mm]:   | 11.3             |

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007