

# Receptacle with flange

Series GS

Item number: GS321-40-A47SN-EAA

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                |
|-------------------------------------------|----------------|
| Size:                                     | 40             |
| Contact type:                             | Socket         |
| Number of coding options:                 | 4              |
| Number of contacts:                       | 47             |
| Number of contacts, size 8H:              | 1              |
| Number of contacts, size 12:              | 22             |
| Number of contacts, size 16:              | 24             |
| Shell material:                           | Aluminum alloy |
| Surface:                                  | Zinc           |
| Type of surface:                          | Passivated     |
| Thickness of surface treatment [ $\mu$ ]: | 12-15 $\mu$    |
| Surface colour:                           | Black          |
| Corrosion resistance [h]:                 | 200            |

## MECHANICAL PROPERTIES

Operation temperature [°C]: -55 - +90

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): ≤ 0.5

EMI: Yes

Coupling-torque to lock [Nm]: max. 10.0

Coupling-torque to open [Nm]: min. 5.9

## THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

## ELECTRICAL PROPERTIES

Operating voltage DC [V]: 700

Operating voltage AC [V]: 500

Test voltage AC [V]: 2000

Insulation resistance (MΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 3.2




Voltage class: MIL-DTL-5015

## ELECTRICAL PROPERTIES CONTACTS

|                                             |    |
|---------------------------------------------|----|
| Size 8H - rated current (continuous) [A]:   | 56 |
| Size 8H - maximum current (short-term) [A]: | 90 |
| Size 8H - test current [A]:                 | 72 |
| Size 12 - rated current (continuous) [A]:   | 23 |
| Size 12 - maximum current (short-term) [A]: | 41 |
| Size 12 - test current [A]:                 | 35 |
| Size 16 - rated current (continuous) [A]:   | 13 |
| Size 16 - maximum current (short-term) [A]: | 22 |
| Size 16 - test current [A]:                 | 20 |

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

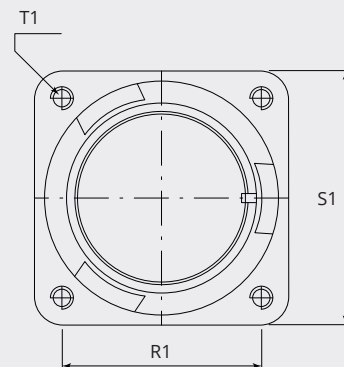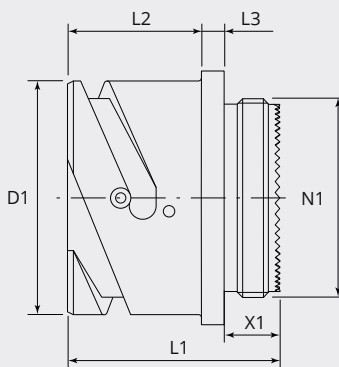

## DIMENSIONS

|            |                  |
|------------|------------------|
| D1 Ø [mm]: | 65.5             |
| L1 [mm]:   | 39.5             |
| L2 [mm]:   | 24.1             |
| L3 [mm]:   | 4.0              |
| N1:        | 2 5/16"-16 UN 2A |
| T1 [mm]:   | 4.3              |
| X1 [mm]:   | 11.3             |
| S1 [mm]:   | 69.8             |
| R1 [mm]:   | 55.6             |

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007