

# Plug with bayonet coupling nut, for EMI applications

Series GS

Item number: GS601-32-013SN-EAA  
Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                |
|-------------------------------------------|----------------|
| Size:                                     | 32             |
| Contact type:                             | Socket         |
| Number of coding options:                 | 4              |
| Number of contacts:                       | 13             |
| Number of contacts, size 12:              | 13             |
| Shell material:                           | Aluminum alloy |
| Surface:                                  | Zinc           |
| Type of surface:                          | Passivated     |
| Thickness of surface treatment [ $\mu$ ]: | 12-15 $\mu$    |
| Surface colour:                           | Black          |
| Corrosion resistance [h]:                 | 200            |
| Operation temperature [°C]:               | -55 - +90      |

## MECHANICAL PROPERTIES

|                               |            |
|-------------------------------|------------|
| Temperature shock [°C]:       | -55 - +125 |
| Conductivity (MΩ):            | ≤ 0.5      |
| EMI:                          | Yes        |
| Coupling-torque to lock [Nm]: | max. 8.0   |
| Coupling-torque to open [Nm]: | min. 3.6   |

## THERMAL PROPERTIES

|                                    |                       |
|------------------------------------|-----------------------|
| Material contact insert:           | Ethylene acrylate GXF |
| Operating temperature insert [°C]: | -55 - +150            |

## ELECTRICAL PROPERTIES

|                                    |               |
|------------------------------------|---------------|
| Operating voltage AC [V]:          | 250/450*      |
| Voltage class:                     | SEV-EN60998-1 |
| Contact numbers:                   | All           |
| Operating voltage DC [V]:          | 1250          |
| Operating voltage AC [V]:          | 900           |
| Test voltage AC [V]:               | 2800          |
| Insulation resistance (mΩ):        | ≥ 5000        |
| Insulation creepage distance [mm]: | ≥ 4.8         |
| Voltage index:                     | MIL-DTL-5015  |

## ELECTRICAL PROPERTIES CONTACTS


|                                           |    |
|-------------------------------------------|----|
| Size 12 - rated current (continuous) [A]: | 23 |
|-------------------------------------------|----|

|                                             |    |
|---------------------------------------------|----|
| Size 12 - maximum current (short-term) [A]: | 41 |
|---------------------------------------------|----|

|                             |    |
|-----------------------------|----|
| Size 12 - test current [A]: | 35 |
|-----------------------------|----|

|                                   |         |
|-----------------------------------|---------|
| Fire protection class EN 45545-2: | R23/HL3 |
|-----------------------------------|---------|

## DIMENSIONS

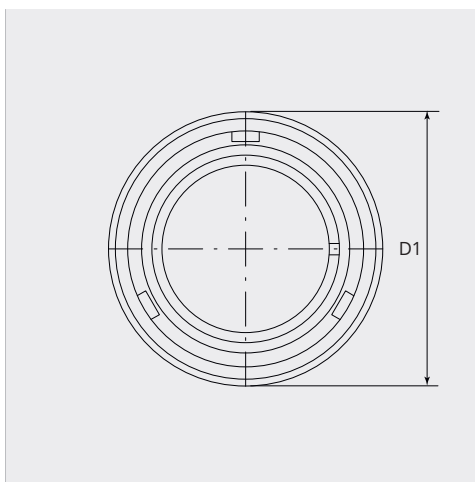

## DIMENSIONS

|            |                 |
|------------|-----------------|
| D1 Ø [mm]: | 60              |
| L1 [mm]:   | 38.0            |
| N1:        | 1 7/8"-16 UN 2A |
| X1 [mm]:   | 10.5            |

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1Temperature shock tested acc. MIL 202F, 107G MethodElectrical conductivity acc. MIL 1344A, Test 3007