


# Receptacle with threaded coupling, front panel mount

Series GT

Item number: GT210-24-07SN-EAC

Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 24                 |
| Contact type:                             | Socket             |
| Number of coding options:                 | 2                  |
| Number of contacts:                       | 7                  |
| Number of contacts, size 12:              | 7                  |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [ $^{\circ}$ C]:    | -55 - +125         |

## MECHANICAL PROPERTIES

|                               |                |
|-------------------------------|----------------|
| Temperature shock [°C]:       | -55 - +125     |
| Conductivity (MΩ):            | Non conductive |
| EMI:                          | No             |
| Coupling-torque to lock [Nm]: | max. 6.5       |
| Coupling-torque to open [Nm]: | min. 2.0       |

## THERMAL PROPERTIES

|                                    |                       |
|------------------------------------|-----------------------|
| Material contact insert:           | Ethylene acrylate GXF |
| Operating temperature insert [°C]: | -55 - +150            |

## ELECTRICAL PROPERTIES

|                                    |               |
|------------------------------------|---------------|
| Operating voltage AC [V]:          | 130/250*      |
| Voltage class:                     | SEV-EN60998-1 |
| Contact numbers:                   | All           |
| Operating voltage DC [V]:          | 1250          |
| Operating voltage AC [V]:          | 900           |
| Test voltage AC [V]:               | 2800          |
| Insulation resistance (mΩ):        | ≥ 5000        |
| Insulation creepage distance [mm]: | ≥ 4.8         |
| Voltage index:                     | MIL-DTL-5015  |

## ELECTRICAL PROPERTIES CONTACTS

Size 12 - rated current (continuous) [A]: 23




Size 12 - maximum current (short-term) [A]: 41

Size 12 - test current [A]: 35

## STANDARDS

Fire protection class EN 45545-2: R23/HL3

## DIMENSIONS

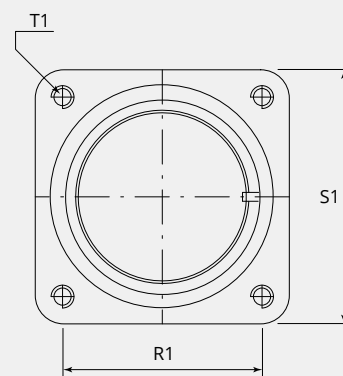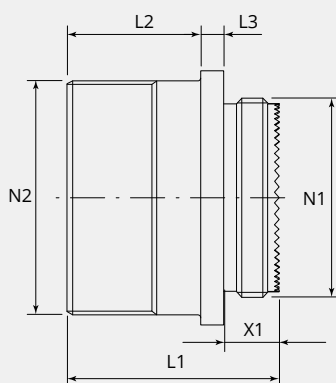

## DIMENSIONS

D1 Ø [mm]: 41

L1 [mm]: 38.8

L2 [mm]: 23.1

## DIMENSIONS

|          |                   |
|----------|-------------------|
| L3 [mm]: | 4.0               |
| N1:      | 1 3/8"-18 UNEF 2A |
| N2:      | 1 1/2"-18 UNEF 2A |
| T1 [mm]: | 3.7               |
| X1 [mm]: | 9.0               |
| S1 [mm]: | 44.5              |
| R1 [mm]: | 35                |


- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007

# Socket contact size 12, 6.0mm<sup>2</sup>

Item number: 10-40560-38AU

Product weight (kg): 0.0033 kg

Packing unit:



## MECHANICAL PROPERTIES CONTACTS

|               |        |
|---------------|--------|
| Contact type: | Socket |
|---------------|--------|

|                                   |    |
|-----------------------------------|----|
| Maximum current (short-term) [A]: | 41 |
|-----------------------------------|----|

|                   |    |
|-------------------|----|
| Test current [A]: | 35 |
|-------------------|----|

|                                 |    |
|---------------------------------|----|
| Rated current (continuous) [A]: | 23 |
|---------------------------------|----|

|                   |          |
|-------------------|----------|
| Contact Material: | CU alloy |
|-------------------|----------|

|                   |                    |
|-------------------|--------------------|
| Protective layer: | Gold plated, 0.5µm |
|-------------------|--------------------|

|                  |       |
|------------------|-------|
| Connection type: | Crimp |
|------------------|-------|

|                                  |   |
|----------------------------------|---|
| Wire section [mm <sup>2</sup> ]: | 6 |
|----------------------------------|---|

|                     |    |
|---------------------|----|
| Wire section [AWG]: | 10 |
|---------------------|----|

|                        |   |
|------------------------|---|
| Stripping length [mm]: | 9 |
|------------------------|---|

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 3.5  |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 0.5mm<sup>2</sup>

Item number: 10-40560-11AU

Product weight (kg): 0.0031 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.5

Wire section [AWG]: 20

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |     |
|------------|-----|
| D1 Ø [mm]: | 4.8 |
| D2 Ø [mm]: | 3   |
| d1 Ø [mm]: | 1.1 |
| d2 Ø [mm]: | 2.4 |
| L1 [mm]:   | 38  |
| T1 [mm]:   | 8.5 |

## Socket contact size 12, 2.5mm<sup>2</sup>

Item number: 10-40560-22AU

Product weight (kg): 0.0033 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 2.5

Wire section [AWG]: 14

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 2.25 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

# Socket contact size 12, 1.5mm<sup>2</sup>

Item number: 10-40560-18AU

Product weight (kg): 0.0033 kg

Packing unit:



## MECHANICAL PROPERTIES CONTACTS

**Contact type:** Socket

**Maximum current (short-term) [A]:** 41

**Test current [A]:** 35

**Rated current (continuous) [A]:** 23

**Contact Material:** CU alloy

**Protective layer:** Gold plated, 0.5µm

**Connection type:** Crimp

**Wire section [mm<sup>2</sup>]:** 1.5

**Wire section [AWG]:** 18 - 16

**Stripping length [mm]:** 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.95 |
| d1 Ø [mm]: | 1.75 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 4.0mm<sup>2</sup>

Item number: 10-40560-30AU

Product weight (kg): 0.0035 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 4

Wire section [AWG]: 12 - 10

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 4.75 |
| d1 Ø [mm]: | 2.95 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |

## Socket contact size 12, 0.75 - 1.0mm<sup>2</sup>

Item number: 10-40560-15AU

Product weight (kg): 0.0032 kg

Packing unit:



### MECHANICAL PROPERTIES CONTACTS

Contact type: Socket

Maximum current (short-term) [A]: 41

Test current [A]: 35

Rated current (continuous) [A]: 23

Contact Material: CU alloy

Protective layer: Gold plated, 0.5µm

Connection type: Crimp

Wire section [mm<sup>2</sup>]: 0.75 - 1.0

Wire section [AWG]: 22 - 18

Stripping length [mm]: 9

## DIMENSIONS



## DIMENSIONS

|            |      |
|------------|------|
| D1 Ø [mm]: | 4.8  |
| D2 Ø [mm]: | 3.35 |
| d1 Ø [mm]: | 1.45 |
| d2 Ø [mm]: | 2.4  |
| L1 [mm]:   | 38   |
| T1 [mm]:   | 8.5  |