

Plug with threaded coupling nut

Series GT

Item number: GT60-28-10PN-EAC

Packing unit: 1



MECHANICAL PROPERTIES

Size:	28
Contact type:	Pin
Number of coding options:	4
Number of contacts:	7
Number of contacts, size 4:	2
Number of contacts, size 8H:	2
Number of contacts, size 12:	3
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	12-15 μ
Surface colour:	Black
Corrosion resistance [h]:	200

MECHANICAL PROPERTIES

Operation temperature [°C]: -55 - +90

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): ≤ 0.5

Coupling-torque to lock [Nm]: max. 7.0

Coupling-torque to open [Nm]: min. 2.7

THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

ELECTRICAL PROPERTIES

Contact numbers:	G
Operating voltage DC [V]:	1250
Operating voltage AC [V]:	900
Test voltage AC [V]:	2800
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 4.8
Voltage class:	MIL-DTL-5015
Contact numbers:	Rest
Operating voltage DC [V]:	700
Operating voltage AC [V]:	500
Test voltage AC [V]:	2000
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 3.2
Voltage index:	MIL-DTL-5015

ELECTRICAL PROPERTIES CONTACTS


Size 4 - rated current (continuous) [A]:	80
Size 4 - maximum current (short-term) [A]:	135
Size 4 - test current [A]:	110
Size 8H - rated current (continuous) [A]:	56
Size 8H - maximum current (short-term) [A]:	90
Size 8H - test current [A]:	72
Size 12 - rated current (continuous) [A]:	23
Size 12 - maximum current (short-term) [A]:	41
Size 12 - test current [A]:	35

STANDARDS

Fire protection class EN 45545-2:

R23/HL3

DIMENSIONS

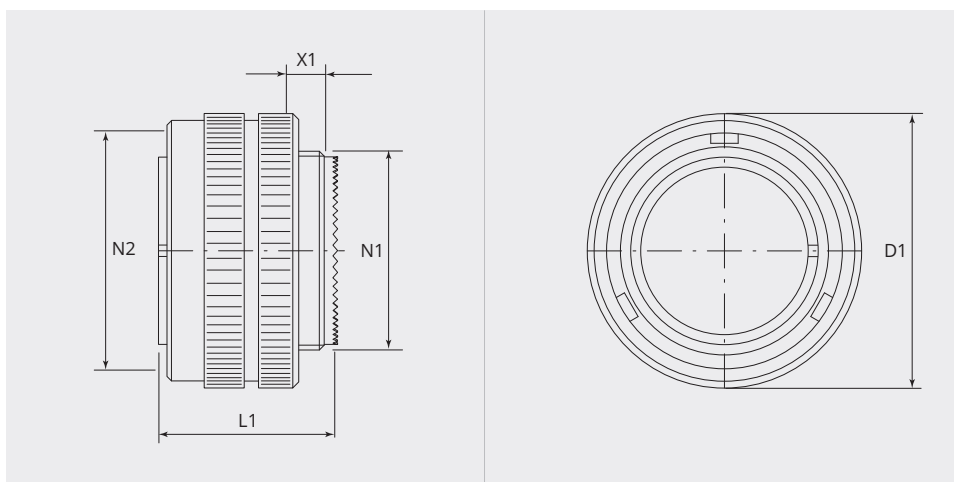

DIMENSIONS

D1 Ø [mm]:	50
L1 [mm]:	36.0
N1:	1 5/8"-18 UNEF 2A
N2:	1 3/4"-18 UNEF 2B
X1 [mm]:	9.0

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method Electrical conductivity acc. MIL 1344A, Test 3007

Pin contact size 12, 1.5mm²

Item number: 10-40561-18AU

Product weight (kg): 0.0024 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
---------------	-----

Maximum current (short-term) [A]:	41
-----------------------------------	----

Test current [A]:	35
-------------------	----

Rated current (continuous) [A]:	23
---------------------------------	----

Contact Material:	CU alloy
-------------------	----------

Protective layer:	Gold plated, 0.5µm
-------------------	--------------------

Connection type:	Crimp
------------------	-------

Wire section [mm ²]:	1.5
----------------------------------	-----

Wire section [AWG]:	18 - 16
---------------------	---------

Stripping length [mm]:	9
------------------------	---

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.95
D3 Ø [mm]:	2.4
d1 Ø [mm]:	1.75
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 12, 0.5mm²

Item number: 10-40561-11AU

Product weight (kg): 0.0022 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
---------------	-----

Maximum current (short-term) [A]:	41
-----------------------------------	----

Test current [A]:	35
-------------------	----

Rated current (continuous) [A]:	23
---------------------------------	----

Contact Material:	CU alloy
-------------------	----------

Protective layer:	Gold plated, 0.5µm
-------------------	--------------------

Connection type:	Crimp
------------------	-------

Wire section [mm ²]:	0.5
----------------------------------	-----

Wire section [AWG]:	20
---------------------	----

Stripping length [mm]:	9
------------------------	---

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	4.8
D2 Ø [mm]:	3
D3 Ø [mm]:	2.4
d1 Ø [mm]:	1.1
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 12, 2.5mm²

Item number: 10-40561-22AU

Product weight (kg): 0.0023 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	41
Test current [A]:	35
Rated current (continuous) [A]:	23
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	2.5
Wire section [AWG]:	14
Stripping length [mm]:	9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.95
D3 Ø [mm]:	2.4
d1 Ø [mm]:	2.25
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 8H, 6mm²

Item number: 10-40794-38AG

Product weight (kg): 0.0061 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	90
Test current [A]:	72
Rated current (continuous) [A]:	56
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	6
Wire section [AWG]:	10
Stripping length [mm]:	9

DIMENSIONS

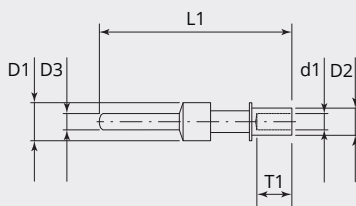

DIMENSIONS


D1 Ø [mm]:	7.8
D2 Ø [mm]:	5
D3 Ø [mm]:	3.6
d1 Ø [mm]:	3.55
L1 [mm]:	41
T1 [mm]:	8.5

Pin contact size 8H, 2.5mm²

Item number: 10-40794-22AG

Product weight (kg): 0.006 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	90
Test current [A]:	72
Rated current (continuous) [A]:	56
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	2.5
Wire section [AWG]:	12
Stripping length [mm]:	9

DIMENSIONS

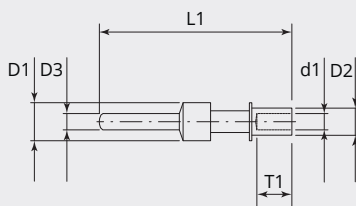

DIMENSIONS


D1 Ø [mm]:	7.8
D2 Ø [mm]:	4
D3 Ø [mm]:	3.6
d1 Ø [mm]:	2.3
L1 [mm]:	41
T1 [mm]:	8.5

Pin contact size 4, 16mm²

Item number: 10-660-4-16G62

Product weight (kg): 0.0154 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	135
Test current [A]:	110
Rated current (continuous) [A]:	80
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	16
Stripping length [mm]:	13

DIMENSIONS



DIMENSIONS



D1 Ø [mm]:	11
D2 Ø [mm]:	9.3
D3 Ø [mm]:	5.7
d1 Ø [mm]:	6.2
L1 [mm]:	41
T1 [mm]:	12.2

Pin contact size 8H, 10mm²

Item number: 10-40794-50AG

Product weight (kg): 0.0066 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	90
Test current [A]:	72
Rated current (continuous) [A]:	56
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	10
Wire section [AWG]:	8 - 6
Stripping length [mm]:	13

DIMENSIONS

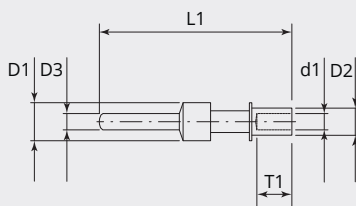

DIMENSIONS


D1 Ø [mm]:	7.8
D2 Ø [mm]:	6.35
D3 Ø [mm]:	3.6
d1 Ø [mm]:	4.6
L1 [mm]:	41
T1 [mm]:	12.2

Pin contact size 8H, 1.5mm²

Item number: 10-40794-18AG

Product weight (kg): 0.0062 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	90
Test current [A]:	72
Rated current (continuous) [A]:	56
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	1.5
Wire section [AWG]:	16
Stripping length [mm]:	9

DIMENSIONS

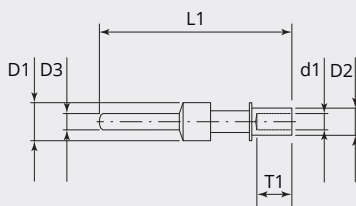

DIMENSIONS


D1 Ø [mm]:	7.8
D2 Ø [mm]:	4
D3 Ø [mm]:	3.6
d1 Ø [mm]:	1.75
L1 [mm]:	41
T1 [mm]:	8.5

Pin contact size 12, 4.0mm²

Item number: 10-40561-30AU

Product weight (kg): 0.0025 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	41
Test current [A]:	35
Rated current (continuous) [A]:	23
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	4
Wire section [AWG]:	12 - 10
Stripping length [mm]:	9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	4.75
D3 Ø [mm]:	2.4
d1 Ø [mm]:	2.95
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 12, 0.75 - 1.0mm²

Item number: 10-40561-15AU

Product weight (kg): 0.0022 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	41
Test current [A]:	35
Rated current (continuous) [A]:	23
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	0.75 - 1.0
Wire section [AWG]:	22 - 18
Stripping length [mm]:	9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	3.35
D3 Ø [mm]:	2.4
d1 Ø [mm]:	1.45
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 12, 6.0mm²

Item number: 10-40561-38AU

Product weight (kg): 0.0023 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	41
Test current [A]:	35
Rated current (continuous) [A]:	23
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	6
Wire section [AWG]:	10
Stripping length [mm]:	9

DIMENSIONS



DIMENSIONS


D1 Ø [mm]:	4.8
D2 Ø [mm]:	4.75
D3 Ø [mm]:	2.4
d1 Ø [mm]:	3.5
L1 [mm]:	38
T1 [mm]:	8.5

Pin contact size 4, 6.0mm²

Item number: 10-660-4-6G10

Product weight (kg): 0.012 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	135
Test current [A]:	110
Rated current (continuous) [A]:	80
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	6
Wire section [AWG]:	8
Stripping length [mm]:	9

DIMENSIONS

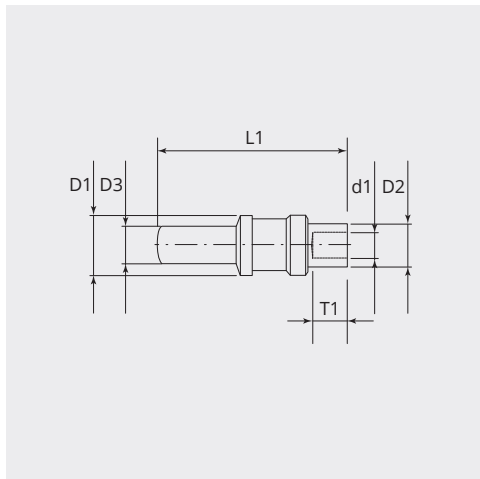

DIMENSIONS


D1 Ø [mm]:	11
D2 Ø [mm]:	5.2
D3 Ø [mm]:	5.7
d1 Ø [mm]:	3.6
L1 [mm]:	41
T1 [mm]:	8.5

Pin contact size 4, 10mm²

Item number: 10-660-4-10G10

Product weight (kg): 0.0127 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	10
Wire section [AWG]:	6
Stripping length [mm]:	13

DIMENSIONS

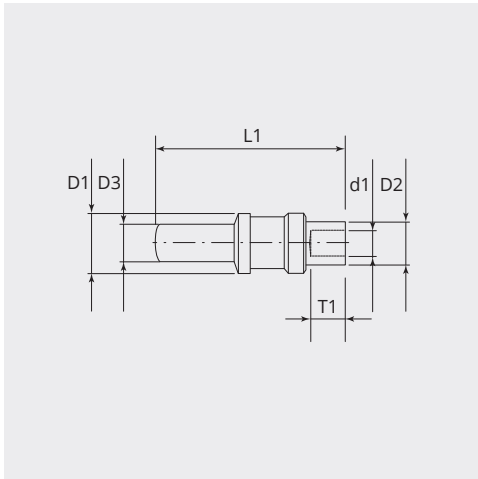

DIMENSIONS


D1 Ø [mm]:	11
D2 Ø [mm]:	6.5
D3 Ø [mm]:	5.7
d1 Ø [mm]:	4.6
L1 [mm]:	41
T1 [mm]:	12.2

Pin contact size 4, 16mm²

Item number: 10-660-4-16G10

Product weight (kg): 0.0136 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	135
Test current [A]:	110
Rated current (continuous) [A]:	80
Contact Material:	CU alloy
Protective layer:	Silver plated, 3.5µm
Connection type:	Crimp
Wire section [mm ²]:	16
Wire section [AWG]:	4 - 3
Stripping length [mm]:	13

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	11
D2 Ø [mm]:	9.3
D3 Ø [mm]:	5.7
d1 Ø [mm]:	7
L1 [mm]:	41
T1 [mm]:	12.2