

# Metallic protection cap to bayonet plug (GR & GS)

Item number: PP40-AC-GR


Packing unit: 1



## MECHANICAL PROPERTIES

|                                           |                    |
|-------------------------------------------|--------------------|
| Size:                                     | 40                 |
| Shell material:                           | Aluminum alloy     |
| Surface:                                  | Epoxy-polyurethane |
| Type of surface:                          | Varnished          |
| Thickness of surface treatment [ $\mu$ ]: | 13-16 $\mu$        |
| Surface colour:                           | Black              |
| Corrosion resistance [h]:                 | 500                |
| Operation temperature [°C]:               | -55 - +125         |
| Temperature shock [°C]:                   | -55 - +125         |
| Conductivity (M $\Omega$ ):               | Non conductive     |
| Chain material:                           | Stainless steel    |

## DIMENSIONS

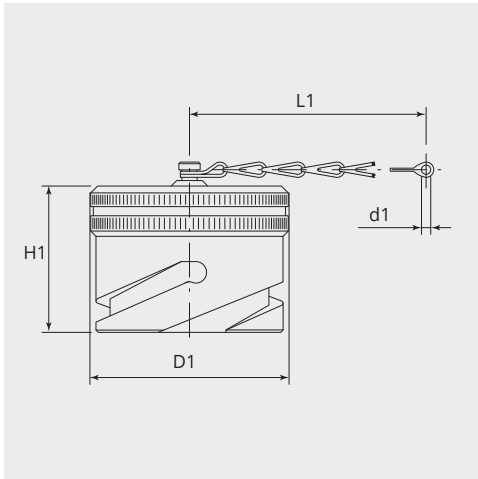

## DIMENSIONS

|              |       |
|--------------|-------|
| D1 Ø [mm]:   | 68    |
| d1 Ø [mm]:   | 4.3   |
| L1 [mm]:     | 190.0 |
| Height [mm]: | 34.5  |

· Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.