


Receptacle, front panel mount

Series GB

Item number: GB210-22-21SN-EAC

Packing unit: 1



MECHANICAL PROPERTIES

Size:	22
Contact type:	Socket
Number of coding options:	4
Number of contacts:	3
Number of contacts, size 0:	1
Number of contacts, size 16:	2
Shell material:	Aluminum alloy
Surface:	Epoxy-polyurethane
Type of surface:	Varnished
Thickness of surface treatment [μ]:	13-16 μ
Surface colour:	Black
Corrosion resistance [h]:	500
Operation temperature [$^{\circ}$ C]:	-55 - +125

MECHANICAL PROPERTIES

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): Non conductive

EMI: No

Coupling-torque to lock [Nm]: max. 6.0

Coupling-torque to open [Nm]: min. 1.5

THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

ELECTRICAL PROPERTIES

Operating voltage DC [V]: 700

Operating voltage AC [V]: 500

Test voltage AC [V]: 2000

Insulation resistance (MΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 3.2




Voltage class: MIL-DTL-5015

ELECTRICAL PROPERTIES CONTACTS

Size 0 - rated current (continuous) [A]:	150
Size 0 - maximum current (short-term) [A]:	245
Size 0 - test current [A]:	200
Size 0* - rated current (continuous) [A]:	200
Size 0* - maximum current (short-term) [A]:	300
Size 0* - test current [A]:	240
Size 16 - rated current (continuous) [A]:	13
Size 16 - maximum current (short-term) [A]:	22
Size 16 - test current [A]:	20

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

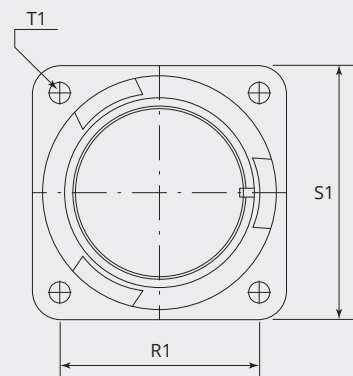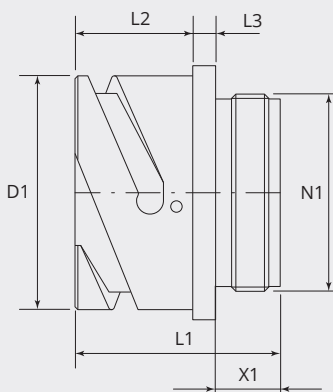

DIMENSIONS

D1 Ø [mm]:	37.4
L1 [mm]:	34.3
L2 [mm]:	19.0
L3 [mm]:	4.0
N1:	1 1/4"-18 UNEF 2A
T1 [mm]:	3.2
X1 [mm]:	9.0
S1 [mm]:	41
R1 [mm]:	31.8

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007