


Receptacle, front panel mount

Series GB

Item number: GB210-40-A4SN-EAC

Packing unit: 1



MECHANICAL PROPERTIES

Size:	40
Contact type:	Socket
Number of contacts:	4
Number of contacts, size 0:	4
Shell material:	Aluminum alloy
Surface:	Epoxy-polyurethane
Type of surface:	Varnished
Thickness of surface treatment [μ]:	13-16 μ
Surface colour:	Black
Corrosion resistance [h]:	500
Operation temperature [$^{\circ}$ C]:	-55 - +125
Temperature shock [$^{\circ}$ C]:	-55 - +125

MECHANICAL PROPERTIES

Conductivity (MΩ):	Non conductive
EMI:	No
Coupling-torque to lock [Nm]:	max. 10.0
Coupling-torque to open [Nm]:	min. 5.9

THERMAL PROPERTIES

Material contact insert:	Ethylene acrylate GXF
Operating temperature insert [°C]:	-55 - +150

ELECTRICAL PROPERTIES




Operating voltage AC [V]:	750
Insulation resistance (mΩ):	≥ 5000
Voltage class:	ABB
Contact numbers:	All
Operating voltage DC [V]:	1750
Operating voltage AC [V]:	1250
Test voltage AC [V]:	3500
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 6.3
Voltage index:	MIL-DTL-5015

ELECTRICAL PROPERTIES CONTACTS

Size 0 - rated current (continuous) [A]:	150
Size 0 - maximum current (short-term) [A]:	245
Size 0 - test current [A]:	200
Size 0* - rated current (continuous) [A]:	200
Size 0* - maximum current (short-term) [A]:	300
Size 0* - test current [A]:	240

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

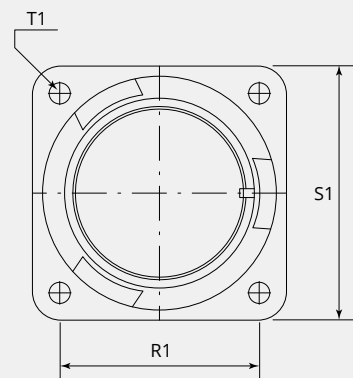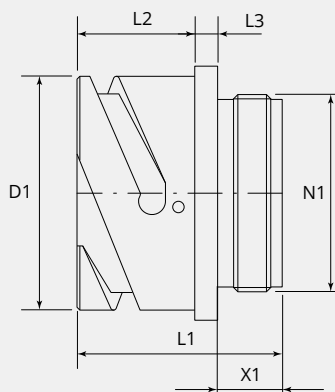

DIMENSIONS

D1 Ø [mm]:	66
L1 [mm]:	37.5
L2 [mm]:	22.2
L3 [mm]:	4.0
N1:	2 5/16"-16 UN 2A
T1 [mm]:	4.3
X1 [mm]:	11.3
S1 [mm]:	69.8
R1 [mm]:	55.6

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method Electrical conductivity acc. MIL 1344A, Test 3007