

Receptacle with flange

Series GR

Item number: GR321-18-1PN-EAA

Packing unit: 1



MECHANICAL PROPERTIES

Size:	18
Contact type:	Pin
Number of coding options:	4
Number of contacts:	10
Number of contacts, size 16:	10
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	12-15 μ
Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [°C]:	-55 - +90
Temperature shock [°C]:	-55 - +125

MECHANICAL PROPERTIES

Conductivity (M Ω): ≤ 0.5

EMI: Yes

Coupling-torque to lock [Nm]: max. 4.0

Coupling-torque to open [Nm]: min. 1.0

THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

ELECTRICAL PROPERTIES

Contact numbers:	B, C, F, G
Operating voltage DC [V]:	700
Operating voltage AC [V]:	500
Test voltage AC [V]:	2000
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 3.2
Voltage class:	MIL-DTL-5015
Contact numbers:	Rest
Operating voltage DC [V]:	250
Operating voltage AC [V]:	200
Test voltage AC [V]:	1000
Insulation resistance (mΩ):	≥ 5000
Insulation creepage distance [mm]:	≥ 1.6
Voltage index:	MIL-DTL-5015


ELECTRICAL PROPERTIES CONTACTS

Size 16 - rated current (continuous) [A]:	13
Size 16 - maximum current (short-term) [A]:	22
Size 16 - test current [A]:	20

STANDARDS

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

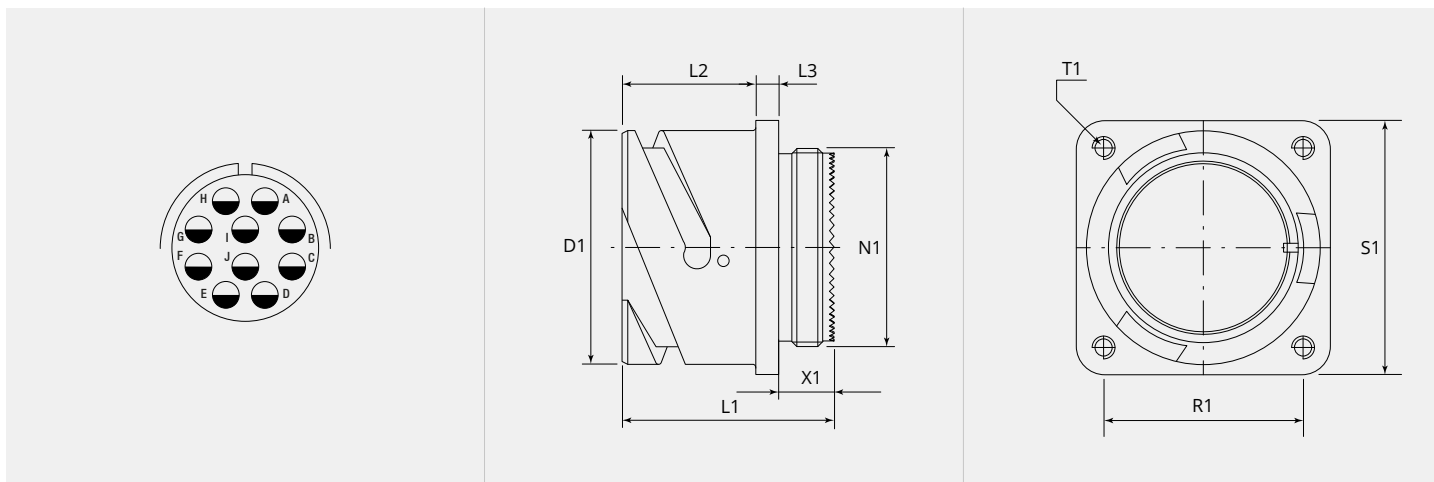

DIMENSIONS

D1 Ø [mm]:	31
L1 [mm]:	38.8
L2 [mm]:	23.1
L3 [mm]:	4.0
N1:	1"-20 UNEF 2A
T1 [mm]:	3.2 / M4
X1 [mm]:	9.0
S1 [mm]:	35
R1 [mm]:	27

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method Electrical conductivity acc. MIL 1344A, Test 3007

Pin contact size 16, 0.25 -0.5mm²

Item number: 10-40557-05AU

Product weight (kg): 0.0009 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	0.25 - 0.5
Wire section [AWG]:	22 - 20
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.15
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.1
L1 [mm]:	32
T1 [mm]:	6.4

Pin contact size 16, 1.0mm²

Item number: 10-40557AU

Product weight (kg): 0.001 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	1
Wire section [AWG]:	16
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.9
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.8
L1 [mm]:	32
T1 [mm]:	6.4

Pin contact size 16, 1.5mm²

Item number: 10-40557-20-1AU

Product weight (kg): 0.001 kg


Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	1.5
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.62
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.75
L1 [mm]:	32
T1 [mm]:	6.4

Pin contact size 16, 0.75mm²

Item number: 10-40557-075AU

Product weight (kg): 0.0009 kg

Packing unit:



MECHANICAL PROPERTIES CONTACTS

Contact type:	Pin
Maximum current (short-term) [A]:	22
Test current [A]:	20
Rated current (continuous) [A]:	13
Contact Material:	CU alloy
Protective layer:	Gold plated, 0.5µm
Connection type:	Crimp
Wire section [mm ²]:	0.75
Wire section [AWG]:	18
Stripping length [mm]:	7

DIMENSIONS



DIMENSIONS

D1 Ø [mm]:	3.1
D2 Ø [mm]:	2.2
D3 Ø [mm]:	1.6
d1 Ø [mm]:	1.35
L1 [mm]:	32
T1 [mm]:	6.4