

Cable receptacle

Series GS

Item number: GS11-36-3SN-EAA

Packing unit: 1



MECHANICAL PROPERTIES

Size:	36
Contact type:	Socket
Number of coding options:	4
Number of contacts:	6
Number of contacts, size 0:	3
Number of contacts, size 12:	3
Shell material:	Aluminum alloy
Surface:	Zinc
Type of surface:	Passivated
Thickness of surface treatment [μ]:	12-15 μ
Surface colour:	Black
Corrosion resistance [h]:	200
Operation temperature [$^{\circ}$ C]:	-55 - +90

MECHANICAL PROPERTIES

Temperature shock [°C]: -55 - +125

Conductivity (MΩ): ≤ 0.5

EMI: Yes

Coupling-torque to lock [Nm]: max. 9.0

Coupling-torque to open [Nm]: min. 4.5

THERMAL PROPERTIES

Material contact insert: Ethylene acrylate GXF

Operating temperature insert [°C]: -55 - +150

ELECTRICAL PROPERTIES

Operating voltage DC [V]: 1250

Operating voltage AC [V]: 900

Test voltage AC [V]: 2800

Insulation resistance (MΩ): ≥ 5000

Insulation creepage distance [mm]: ≥ 4.8




Voltage class: MIL-DTL-5015

ELECTRICAL PROPERTIES CONTACTS

Size 0 - rated current (continuous) [A]:	150
Size 0 - maximum current (short-term) [A]:	245
Size 0 - test current [A]:	200
Size 0* - rated current (continuous) [A]:	200
Size 0* - maximum current (short-term) [A]:	300
Size 0* - test current [A]:	240
Size 12 - rated current (continuous) [A]:	23
Size 12 - maximum current (short-term) [A]:	41
Size 12 - test current [A]:	35

Fire protection class EN 45545-2:	R23/HL3
-----------------------------------	---------

DIMENSIONS

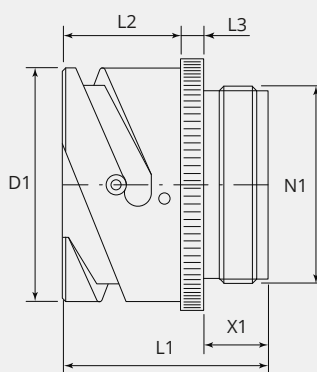

DIMENSIONS

D1 Ø [mm]:	59.6
D2 Ø [mm]:	62.5
L1 [mm]:	37.5
L2 [mm]:	22.2
L3 [mm]:	4.0
N1:	2 1/16"-16 UN 2A
X1 [mm]:	11.3

- Please contact your Gimota partner for other shell materials, surface coatings or contact insert materials.
- Voltage classes tested acc. MIL-DTL-5015 Power transmission verification acc. VG95234 / 2 test 5.10.1 and VG95210 / 37
- Corrosion resistance tested acc. MIL 1344A Test 101.1 Temperature shock tested acc. MIL 202F, 107G Method
- Electrical conductivity acc. MIL 1344A, Test 3007